


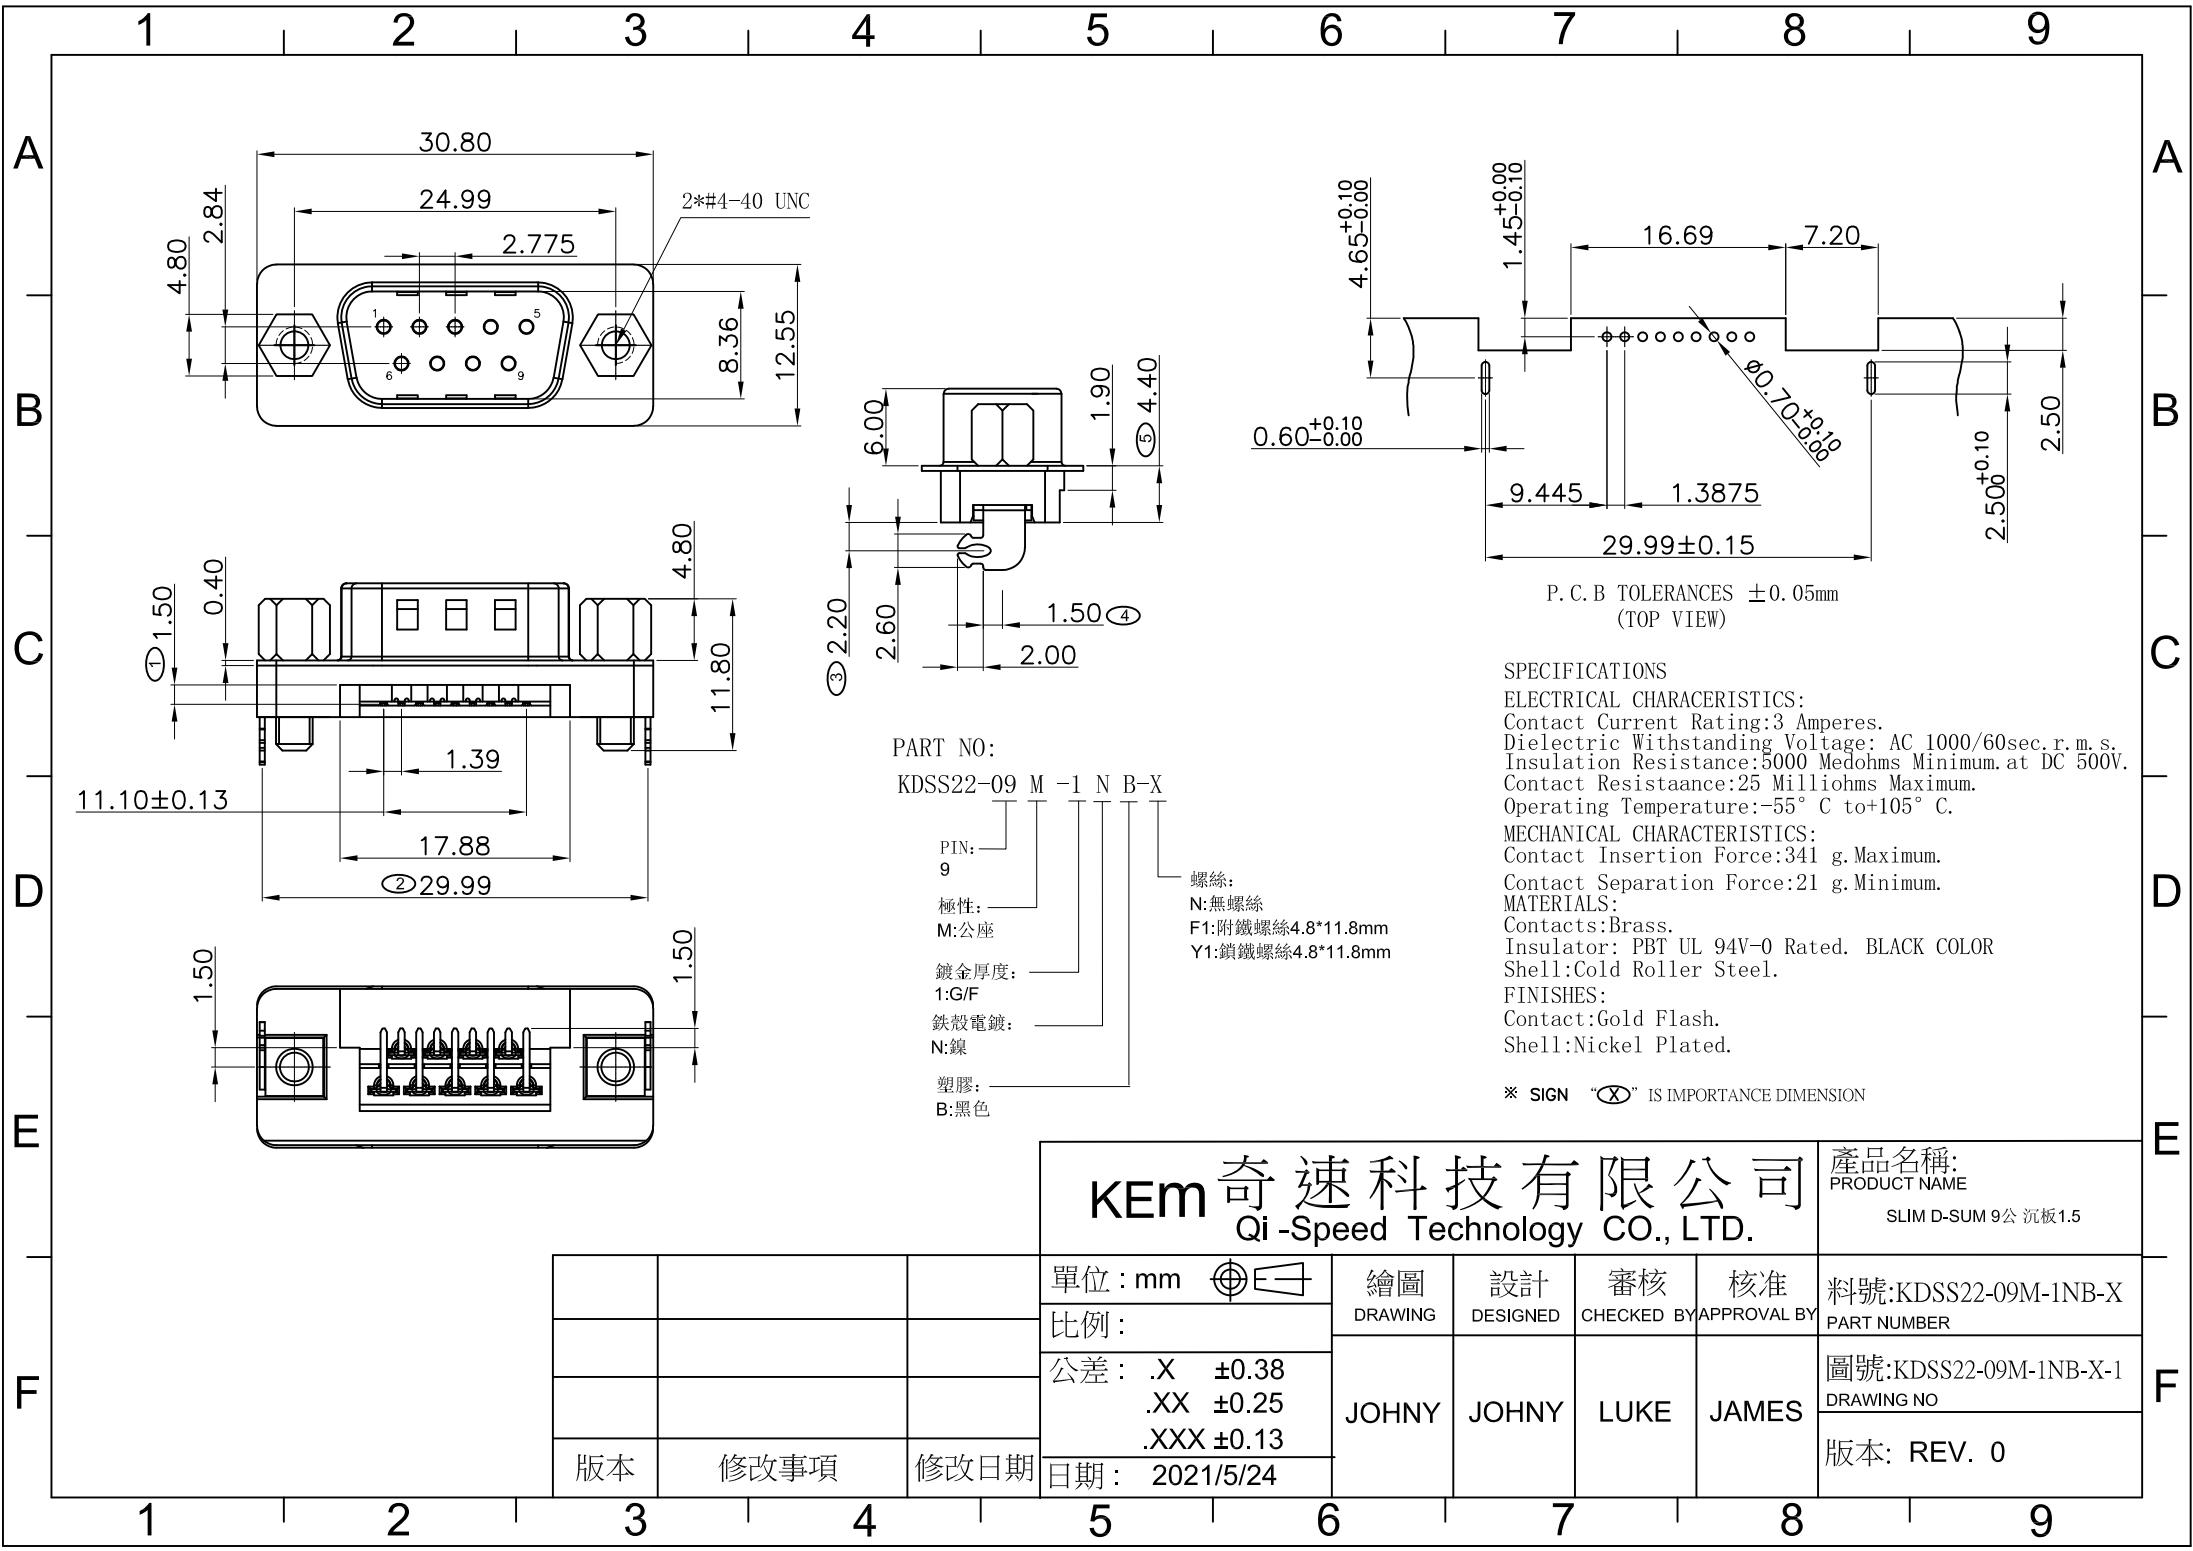

PART NO:

KDSS22-09 M -1 N B-X

PIN:

9

極性:

M:公座

鍍金厚度:

1:G/F

鐵殼電鍍:

N:鍍

塑膠:

B:黑色

螺絲:

N:無螺絲

F1:附鐵螺絲4.8*11.8mm

Y1:鎖鐵螺絲4.8*11.8mm

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.

Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.

Insulation Resistance:5000 Medohms Minimum.at DC 500V.

Contact Resistance:25 Milliohms Maximum.

Operating Temperature:-55° C to+105° C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.

Contact Separation Force:21 g.Minimum.

MATERIALS:

Contacts:Brass.

Insulator: PBT UL 94V-0 Rated. BLACK COLOR

Shell:Cold Roller Steel.

FINISHES:

Contact:Gold Flash.

Shell:Nickel Plated.

* SIGN "X" IS IMPORTANCE DIMENSION

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

SLIM D-SUM 9公 沉板1.5

單位: mm



比例:

公差: .X ±0.38
.XX ±0.25
.XXX ±0.13

日期: 2021/5/24

繪圖

DRAWING

設計

DESIGNED

審核

CHECKED BY

核准

APPROVAL BY

JOHNY

JOHNY

LUKE

JAMES

料號:KDSS22-09M-1NB-X
PART NUMBER

圖號:KDSS22-09M-1NB-X-1
DRAWING NO

版本: REV. 0

版本

修改事項

修改日期