
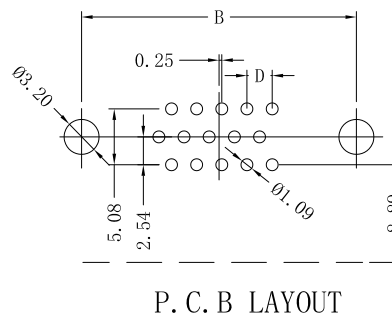


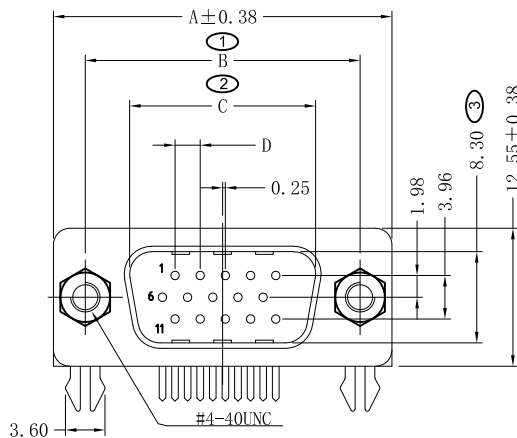

1. MATERIAL:
- 1.1 HOUSING: PBT+30%G.F,UL94 V-0 BLACK/BLUE
 - 1.2 COVER: PBT+30%G.F,UL94 V-0 BLACK/BLUE
 - 1.3 CONTACT: BRASS
 - 1.4 SHELL: SPCC
 - 1.5 BOARD LOCK: SPCC
 - 1.6 SCREW : SPCC

- 2.ELECTRICAL CHARACERISTICS:
- 1.1 Current Rating: 3 Ampere per Contact
 - 1.2 Contact Resistance: 25 Milliohms Max.
 - 1.3 Insulation Resistance: 1000 Megohms Min.
 - 1.4 Dielectric Withstanding Voltage: 1000V AC(RMS)
 - 1.5 Operating Temperature: -40°C to +85°C
- ※ SIGN “(X)” IS IMPORTANCE DIMENSION

PART NO:

KDSB3- XX M -1 N X-X

PIN:
15/26/44/62

極性:
M:公座

鍍金厚度:
1:G/F

鐵殼電鍍:
N:鍍

螺絲:

O:叉鎖螺絲

N:鉚合不附螺絲

F1:鉚附鐵螺絲4.8*11.8

F2:鉚附鐵螺絲5.8*12.8

F3:鉚附銅螺絲4.8*11.8

F4:鉚附銅螺絲5.8*12.8


Y1:鉚鎖鐵螺絲4.8*11.8

Y2:鉚鎖鐵螺絲5.8*12.8

Y3:鉚鎖銅螺絲4.8*11.8

Y4:鉚鎖銅螺絲5.8*12.8

塑膠:
B:BLACK
L:BLUE

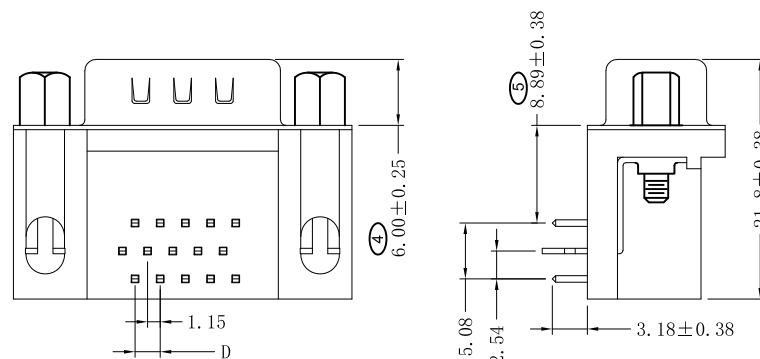

PIN	A	B	C	D
15P	30.80	24.99	16.92	2.29
26P	39.20	33.32	24.25	2.29
44P	53.10	47.04	38.40	2.29
62P	69.40	63.50	55.40	2.41

0:叉鎖	N:鉚合	Y:鉚合鎖	F:鉚合附螺絲

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

D-SUB 90D 公座 8.89mm

單位: mm



繪圖

DRAWING

設計

DESIGNED

審核

CHECKED BY

核准

APPROVAL BY

料號:KDSB3-XXM-1NX-X
PART NUMBER

比例:

公差: .X ±0.38
.XX ±0.25
.XXX ±0.13

JOHNY

JOHNY

LUKE

JAMES

圖號:KDSB3-XXM-1NX-X-1
DRAWING NO

日期: 2013/7/23

版本: REV. 0

版本

修改事項

修改日期