

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

A




B

C

D

E

F

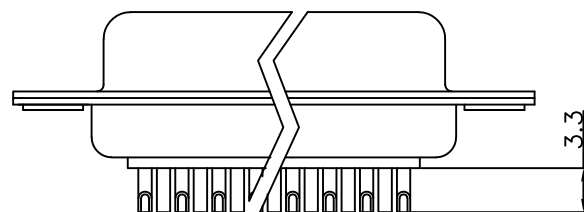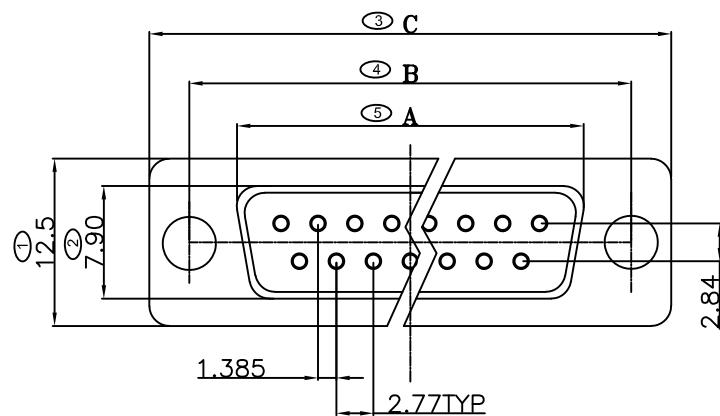

PART NO:

KDSC2 -XX F -1 N X -X X

PIN:

09, 15, 25, 37

極性:
F:母座

鍍金厚度:
1:G/F

鉄殼電鍍:
N:鍍

塑膠:
B:黑色
L:藍色

螺母類型:

1:空心螺母4.8mm
2:空心螺母5.8mm
3:實心螺母4.8mm
4:實心螺母5.8mm

產品類型:

N:空孔
B:前鉚螺母
C:後鉚螺母

说明:

1. 特性:

额定电压 : 500V AC MIN

额定电流 : 5A

接触阻抗 : 30mΩ MAX.

绝缘阻抗 : 5000MΩ MIN.at 500V DC

耐电压值 : 500V AC RMS for 1Minute

温度范围 : -55℃ ~+105℃

2. 材料:

胶 芯 : PBT+30% G.F(UL94V-0)

端 子 : C2680(BRASS), 镀金1u"

铁 壳 : SPCC, 镀镍


螺 母 : BRASS, 镀镍

※ SIGN “(X)” IS IMPORTANCE DIMENSION


No. of Contact	A±0.25	B±0.25	C±0.38	D±0.25
09	16.25	24.99	30.81	19.28
15	24.65	33.32	39.14	27.51
25	38.30	47.04	53.04	41.28
37	54.80	63.50	69.32	57.71

產品類型


N: 孔空



B: 前鉚螺母



C: 後鉚螺母



KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

D-SUB 180度 母座 焊線式

單位: mm



比例:

公差: .X ±0.38
.XX ±0.25
.XXX ±0.13

日期: 2010/5/25

繪圖
DRAWING

設計
DESIGNED

審核
CHECKED BY

核准
APPROVAL BY

JOHNY

JOHNY

LUKE

JAMES

料號:KDSC2-XXF-1NX-XX
PART NUMBER

圖號:KDSC2-XXF-1NX-XX-1
DRAWING NO

版本: REV. 0

版本

修改事項

修改日期

1 2 3 4 5 6 7 8 9