
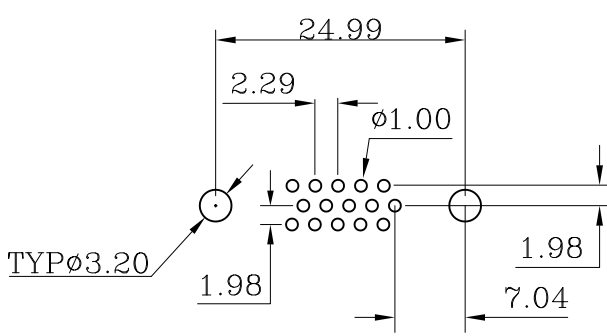

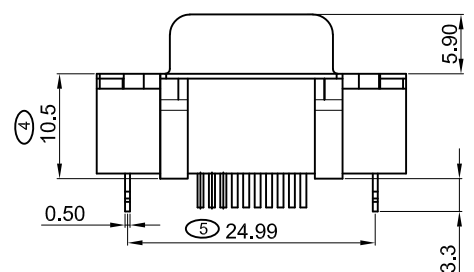


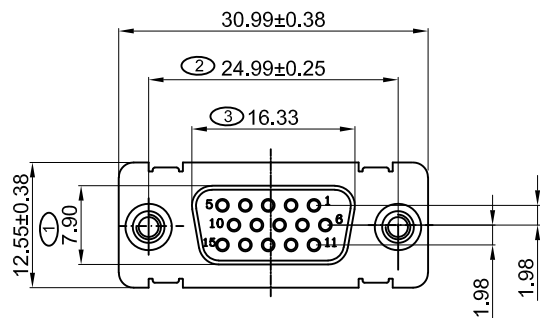

P.C.B LAYOUT

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, NI FINISHED
 INSULATOR : PBT THERMOPLASTIC, 30% GLASS
 FILLED, UL 94V-0 RATED,BLACK/BLUE COLOR
 CONTACT MATERIAL : BRASS
 CONTACT FINISH : SELEVITE GOLD FINISHED
 GROUNDING BRACKET: STEEL MATERIAL , TIN FINISHED
 JACK SCREWS : STEEL MATERIAL , NICKEL FINISHED
 WITH #4-40 THREADED ASSEMBLED

ELECTRICAL CHARACTERISTICS


CONTACT CURRENT RATING : 5.0 AMPS
 CONTACT RESISTANCE : 30 MILLIOHMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
 TEMPERATURE RATING : -40°C ~ +85°C
 * SIGN "X" IS IMPORTANCE DIMENSION

PART NO:

KDSD3-15 F -1 N X -X

PIN: 09, 15, 25, 37
 極性: F:母座
 鍍金厚度: 1:G/F
 塑膠: B:黑色 L:藍色
 鉄殼電鍍: N:鍍

鉚釘型式:
 N:鉚合
 F1:鉚附鐵螺絲4.8*11.8
 F1:鉚附鐵螺絲5.8*12.8
 F1:鉚附銅螺絲4.8*11.8
 F1:鉚附銅螺絲5.8*12.8
 Y1:前鉚鎖鐵螺絲4.8*11.8
 Y2:前鉚鎖鐵螺絲5.8*12.8
 Y3:前鉚鎖銅螺絲4.8*11.8
 Y4:前鉚鎖銅螺絲5.8*12.8

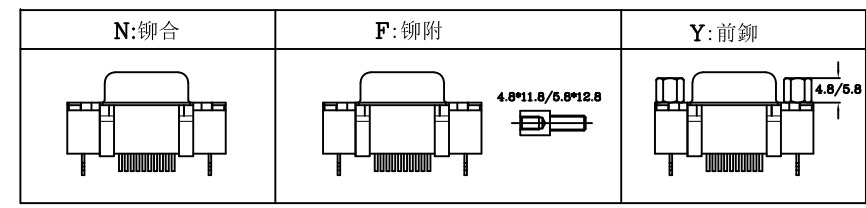

KEM 奇速科技有限公司 Qi-Speed Technology CO., LTD.				產品名稱: PRODUCT NAME D-SUB 15P 母頭 180度 插板高 10.5 鉚合	
單位: mm	繪圖	設計	審核	核准	料號: KDSD3-15F-1NX-X
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38	JOHNY	JOHNY	LUKE	JAMES	圖號: KDSD3-15F-1NX-X-1
.XX ±0.25					DRAWING NO
.XXX ±0.13					版本: REV. 0
日期: 2010/12/5	版本	修改事項	修改日期		