
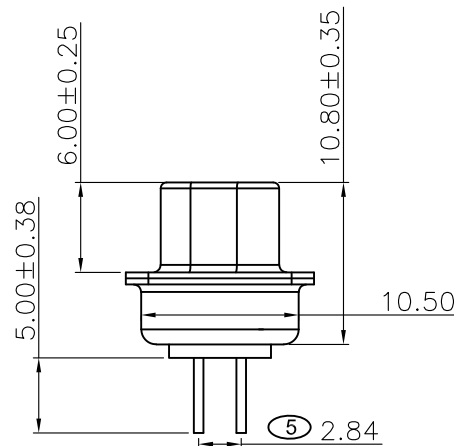
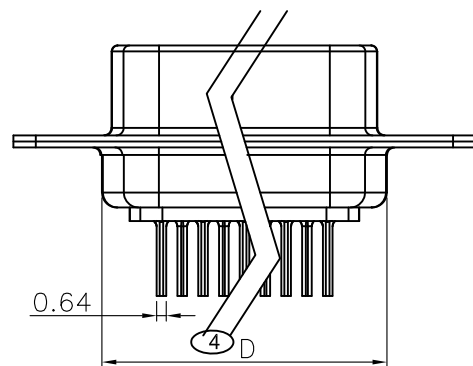


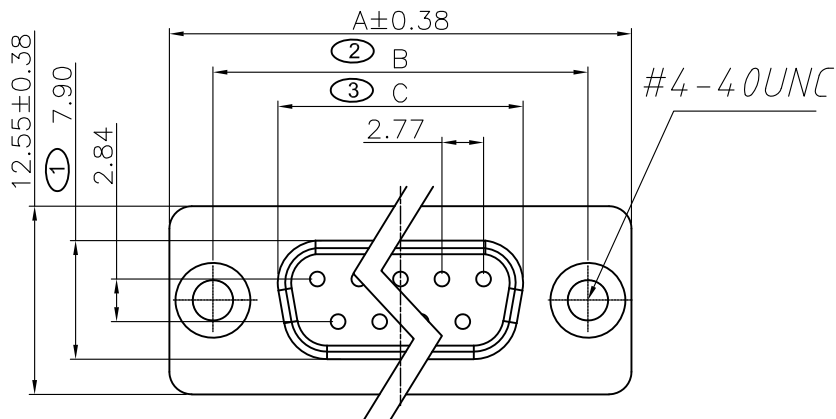

NOTES

- MATERIAL:**
Housing: PBT,UL 94V-0, Color:Black/White
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
- FINISH:**
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.

SPECIFICATIONS

- D-SUB**
- 1.1 Voltage:** 250 VAC(RMS) Max.
- 1.2 Current Rating:** 3 Ampere per Contact
- 1.3 Contact Resistance:** 25 Milliohms Max.
- 1.4 Insulation Resistance:** 1000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage:** 500 VAC(RMS)
- 1.6 Total Mating Force:** 4.0 Kgf Max.
- 1.7 Total Unmating Force:** 1.0 Kgf Min.
- 1.8 Operating Temperature:** -40°C to +85°C

※ SIGN “(X)” IS IMPORTANCE DIMENSION

PART NO:

KDSD9-XXF-1NX-X
①②③④⑤⑥

①PIN:

09,15,25,37

②極性:

F:母座

③端子电镀厚度:

1: G/F

④铁壳电镀:

N: 镍

⑤塑胶颜色:

B: 黑色

W: 白色

⑥铆钉型式:

A1: 前铆实心铁螺母4.8

A2: 前铆实心铁螺母5.8

A3: 前铆实心铜螺母4.8

A4: 前铆实心铜螺母5.8

B1: 后铆实心铁螺母4.8

B2: 后铆实心铁螺母5.8

B3: 后铆实心铜螺母4.8

B4: 后铆实心铜螺母5.8

C: 后铆6.0铜柱鱼叉

E1: 后铆铜柱鱼叉前铆铁螺丝 4.8*11.8

E2: 后铆铜柱鱼叉前铆铁螺丝 5.8*12.8

E3: 后铆铜柱鱼叉前铆铜螺丝 4.8*11.8

E4: 后铆铜柱鱼叉前铆铜螺丝 5.8*12.8

G1: 后铆铜柱鱼叉附铁螺丝 4.8*11.8


G2: 后铆铜柱鱼叉附铁螺丝 5.8*12.8

G3: 后铆铜柱鱼叉附铜螺丝 4.8*11.8

G4: 后铆铜柱鱼叉附铜螺丝 5.8*12.8

N: 铆合(空孔)

铆钉型式说明

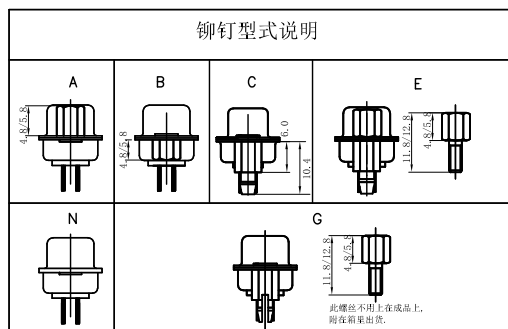

PIN \ DIM	A	B	C	D
09P	30.81	24.99	16.35	19.00
15P	39.14	33.32	24.70	27.70
25P	53.04	47.04	38.40	41.10
37P	69.32	63.50	54.80	57.30

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

單位: mm

比例:

公差: .X ±0.38
.XX ±0.25
.XXX ±0.13

日期: 2010/8/25

繪圖
DRAWING

設計
DESIGNED

審核
CHECKED BY

核准
APPROVAL BY

JOHNY

JOHNY

LUKE

JAMES

產品名稱:
PRODUCT NAME

D-SUB 180° 插板式

料號:KDSD9-XXF-1NX-X
PART NUMBER

圖號:KDSD9-XXF-1NX-X-1
DRAWING NO

版本: REV. 0

版本

修改事項

修改日期