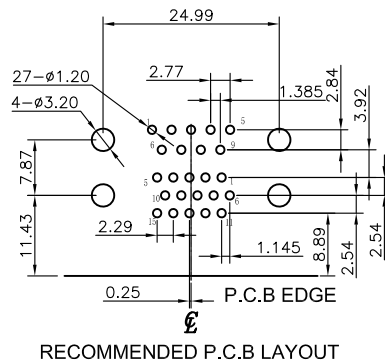
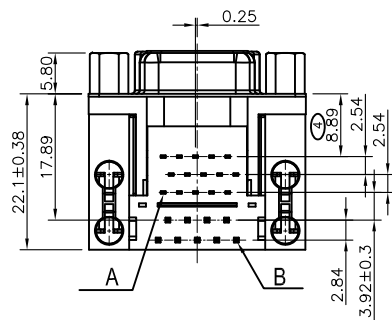
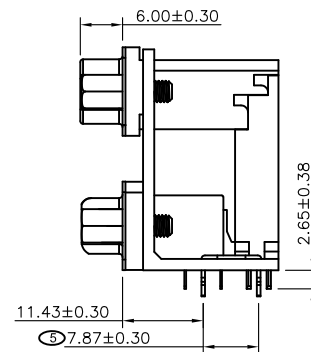
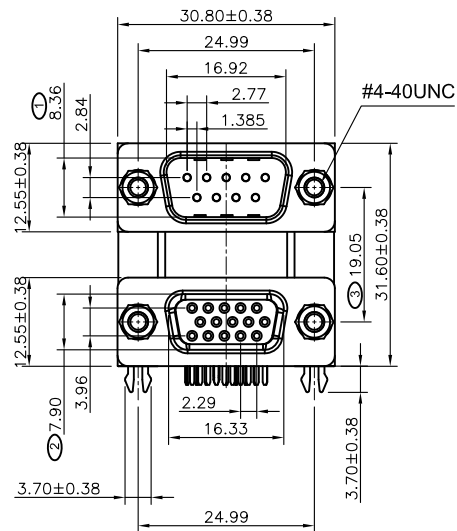


SPECIFICATIONS

- D-SUB
 - Voltage: 250 VAC(RMS) Max.
 - Current Rating: 3 Ampere per Contact
 - Contact Resistance: 30 Milliohms Max.
 - Insulation Resistance: 5000 Megohms Min.
 - Dielectric Withstanding Voltage: 1000V AC(RMS)
 - Total Mating Force: 4.5 Kgf Max.
 - Total Unmating Force: 1.0 Kgf Min.
 - Operating Temperature: -25°C to +85°C
- VGA
 - Voltage: 250 VAC(RMS) Max.
 - Current Rating: 3 Ampere per Contact
 - Contact Resistance: 30 Milliohms Max.
 - Insulation Resistance: 5000 Megohms Min.
 - Dielectric Withstanding Voltage: 1000V AC(RMS)
 - Total Mating Force: 6.0 Kgf Max.
 - Total Unmating Force: 1.2 Kgf Min.
 - Operating Temperature: -25°C to +85°C

NOTES

- MATERIAL:
 - Housing(UPPER):PBT, UL 94V-0, Color:Green or Black.
 - Housing(LOWER):PBT, UL 94V-0, Color:Blue or Black.
 - Connecting Pedestal:PA66, UL 94V-0, Color:Blue
 - Terminal:BRASS
 - Shell:SPCC.
 - Boardlock:BRASS.
 - Bracket:Zinc Alloy.
 - Screw:Ferroalloy.
- FINISH:
 - Terminal:0.8u" Gold Plated in Contact Area,
 - Tin 80U"minPlated over Nickel 30U"min at Solder Ared.
 - Shell:Nickel Plated.
 - Boardlock:Tin Plated.
 - Bracket:Nickel Plated.
 - Screw:Nickel Plated.

* SIGN "X" IS IMPORTANCE DIMENSION

PART NO:

KDSDB-0915 MF 1-N M X X

極性: MF:公座/母座

鍍金厚度: 1:G/F

鐵殼電鍍: N:鎳

N: 鉚鎖不附螺絲
Y: 鉚鎖螺絲
F: 鉚鎖附螺絲

塑膠:
B:黑色&黑色
L:綠色&藍色
M: 19.05mm

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

DR 9公对HDR 15母
(8.89) 19.05鉚合附/鎖螺絲

單位: mm	繪圖	設計	審核	核准	料號:KDSDB-0915MF1-NMXX
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.25 .XXX ±0.15	JOHNY	JOHNY	LUKE	JAMES	圖號:KDSDB-0915MF1-NMXX-1
日期: 2010/6/18					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0