

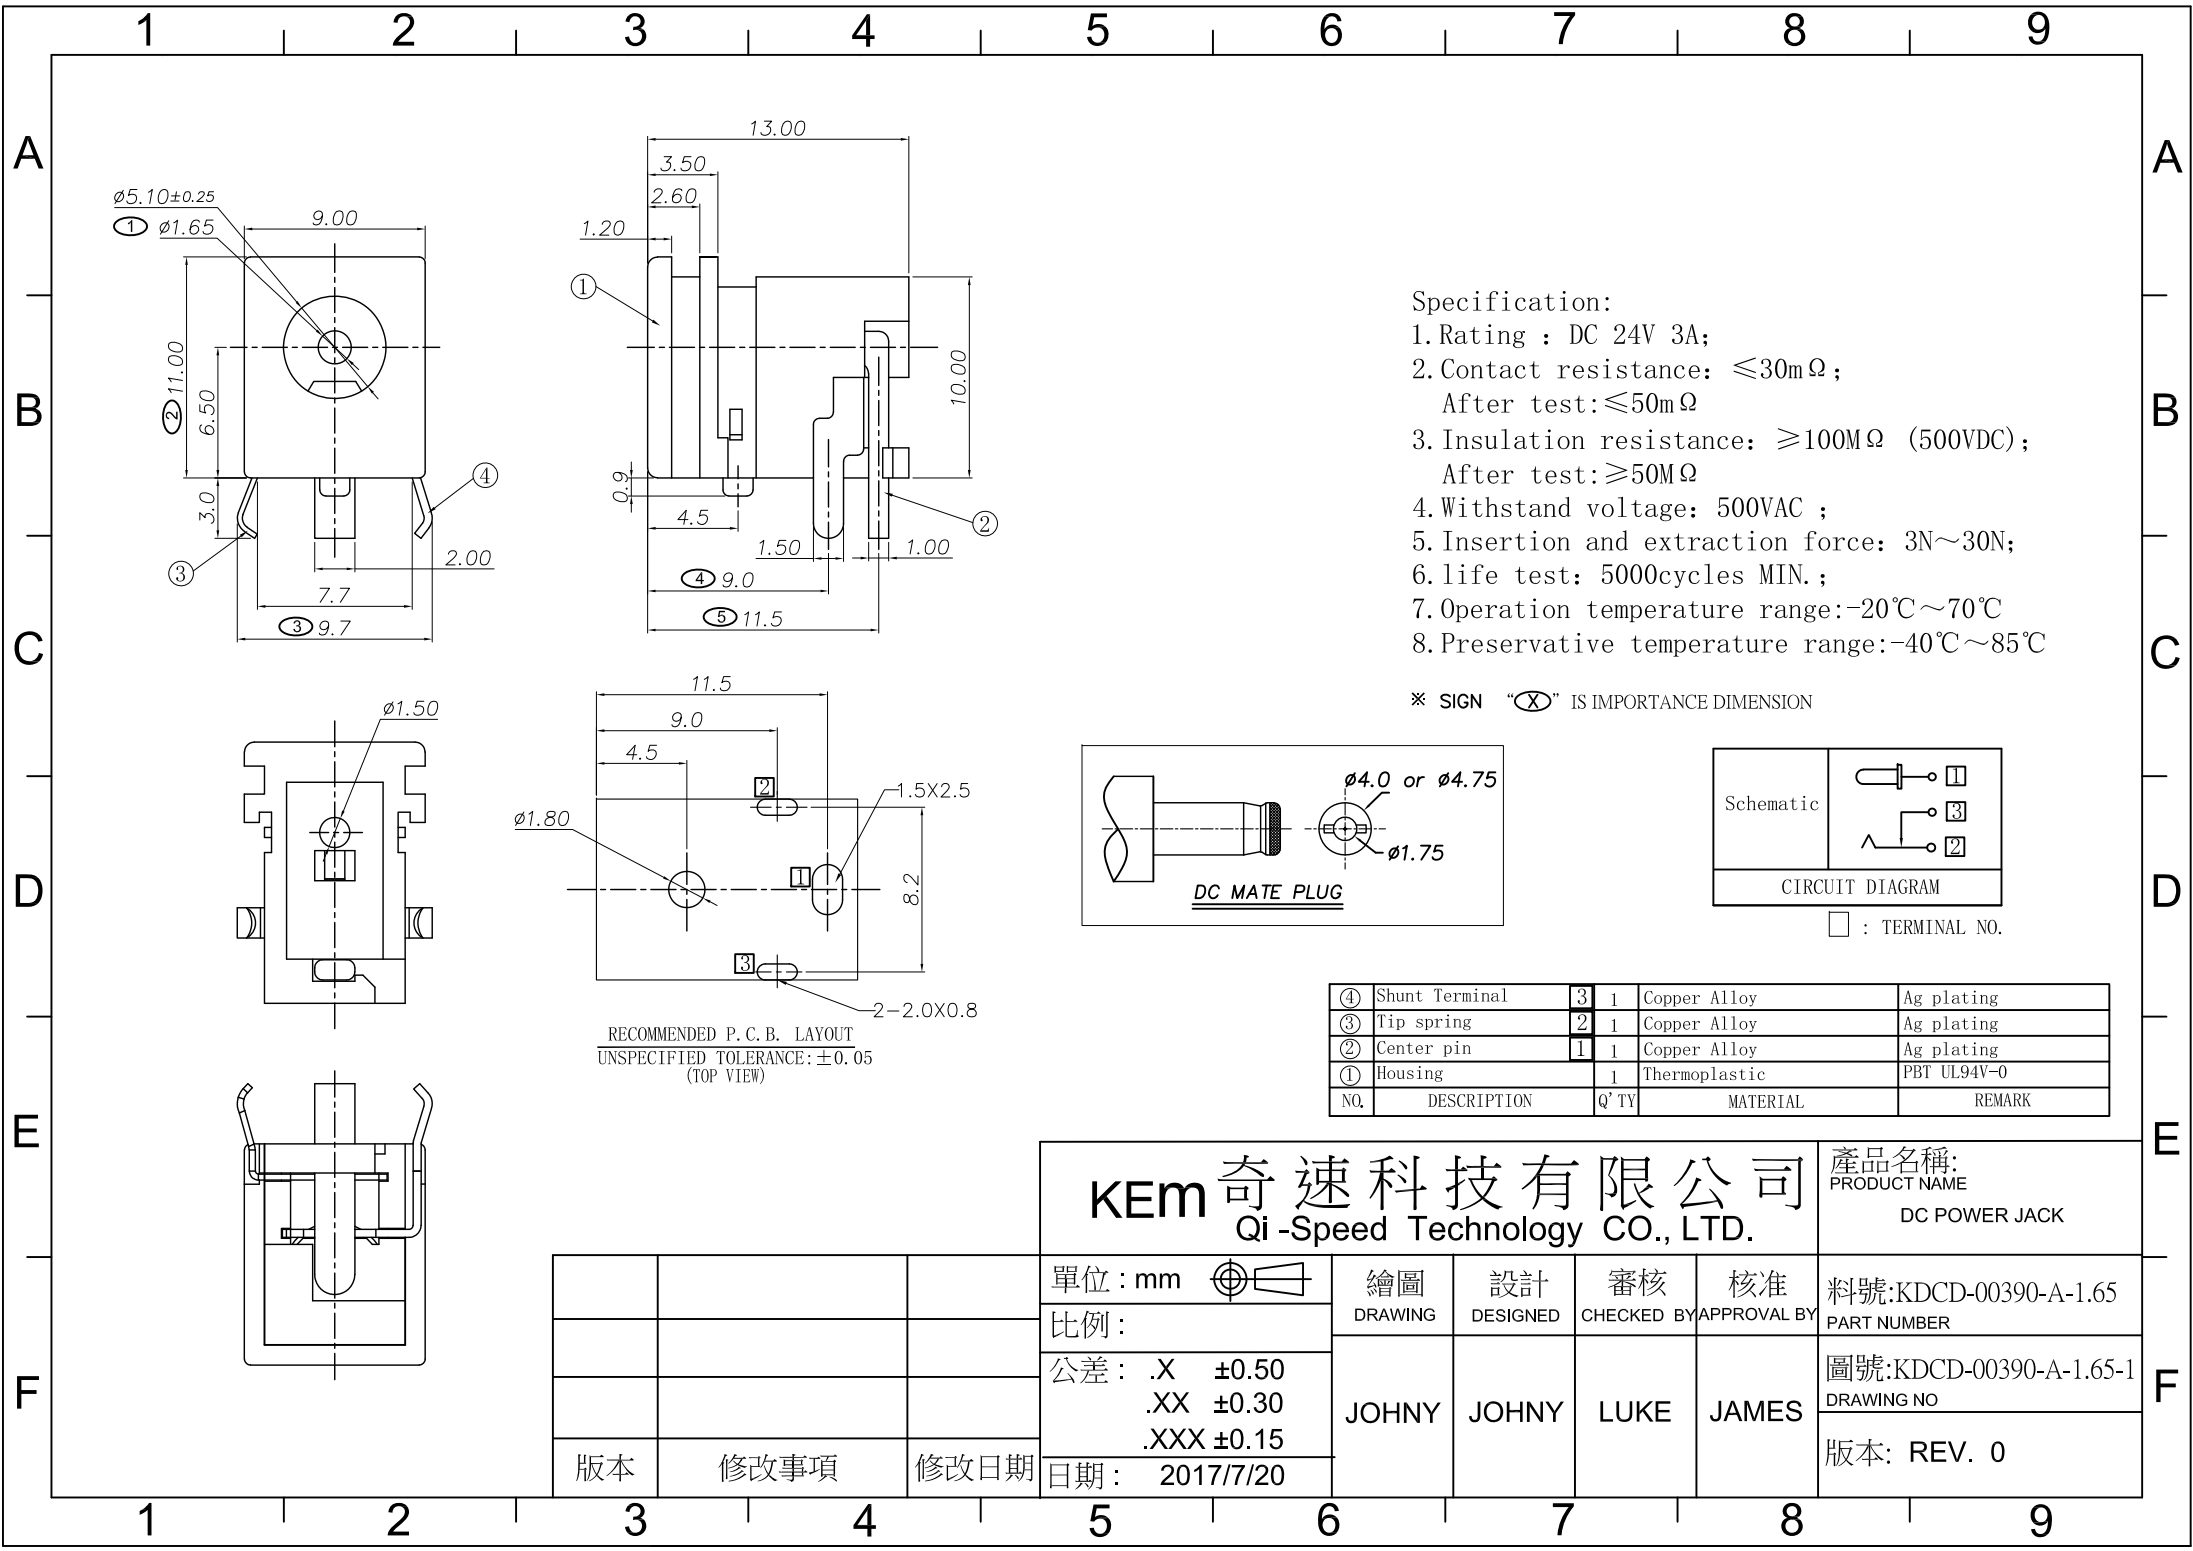




- Specification:
- 1. Rating : DC 24V 3A;
 - 2. Contact resistance: $\leq 30\text{m}\Omega$;
After test: $\leq 50\text{m}\Omega$
 - 3. Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC);
After test: $\geq 50\text{M}\Omega$
 - 4. Withstand voltage: 500VAC ;
 - 5. Insertion and extraction force: 3N~30N;
 - 6. life test: 5000cycles MIN. ;
 - 7. Operation temperature range: $-20^{\circ}\text{C}\sim 70^{\circ}\text{C}$
 - 8. Preservative temperature range: $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$

※ SIGN “(X)” IS IMPORTANCE DIMENSION

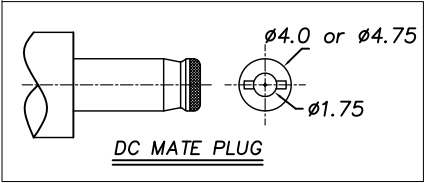

□ : TERMINAL NO.

④	Shunt Terminal	3	1	Copper Alloy	Ag plating
③	Tip spring	2	1	Copper Alloy	Ag plating
②	Center pin	1	1	Copper Alloy	Ag plating
①	Housing		1	Thermoplastic	PBT UL94V-0
NO.	DESCRIPTION	Q' TY		MATERIAL	REMARK

KEM 奇速科技有限公司 Qi-Speed Technology CO., LTD.					產品名稱: PRODUCT NAME DC POWER JACK
單位 : mm	繪圖 DRAWING	設計 DESIGNED	審核 CHECKED BY	核准 APPROVAL BY	料號:KDCD-00390-A-1.65 PART NUMBER
比例:	JOHNY	JOHNY	LUKE	JAMES	圖號:KDCD-00390-A-1.65-1 DRAWING NO
公差: .X ±0.50 .XX ±0.30 .XXX ±0.15					版本: REV. 0
日期: 2017/7/20					