

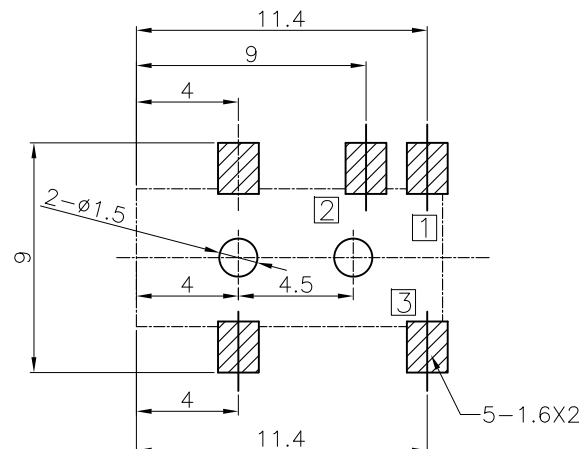
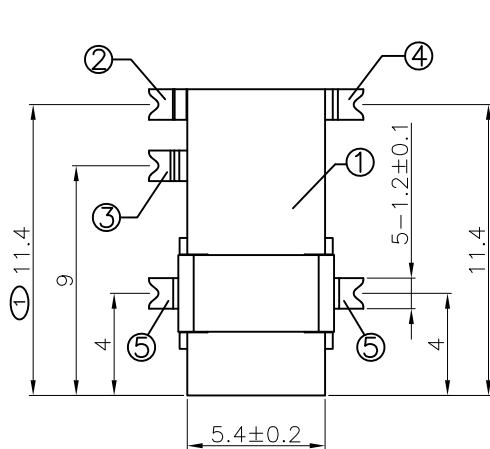
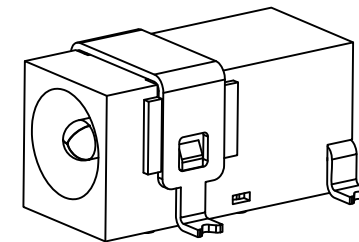


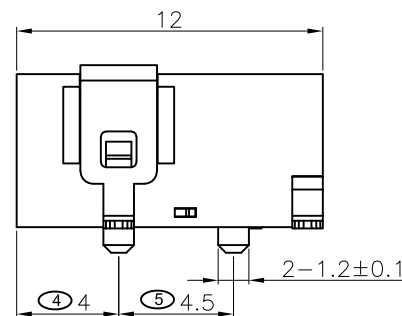


P. C. B Layout(Copper-sided view)

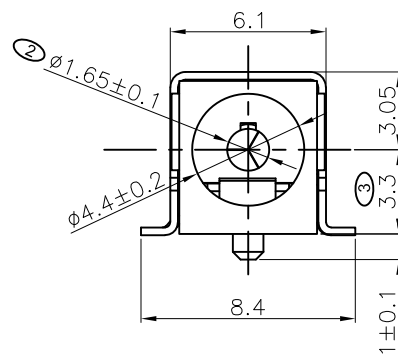

SPECIFICATION


- 1.Rating : DC 6.3V 2A;
- 2.Contact resistance: $\leq 30m\Omega$;
- 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles.

※ SIGN "X" IS IMPORTANCE DIMENSION



□ : TERMINAL NO.

⑤	Frame	1	Brass t=0.3	Ag-Plating
④	Shunt terminal	③	Brass t=0.3	Ag-Plating
③	Tip spring	②	Phosphor Bronze t=0.3	Ag-Plating
②	Center pin	①	Brass t=0.3	Ag-Plating
①	Housing	1	PA6T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

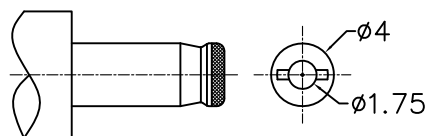

DC MATE PLUG

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
DC POWER JACK

單位 : mm

比例 :

公差 : X . ± 0.38
.X ± 0.30
.XX ± 0.30

日期 : 2008/12/13

繪圖	設計	審核	核准
DRAWING	DESIGNED	CHECKED BY	APPROVAL BY
JOHNY	JOHNY	LUKE	JAMES

料號:KDCS-042-1.65
PART NUMBER

圖號:KDCS-042-1.65-1
DRAWING NO

版本: REV. 0

版本	修改事項	修改日期