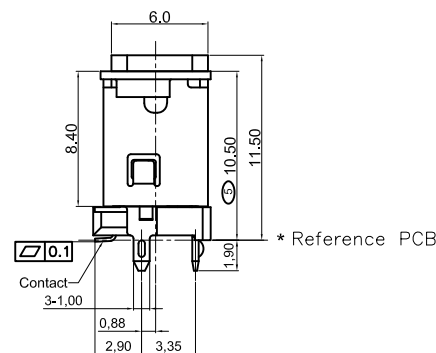
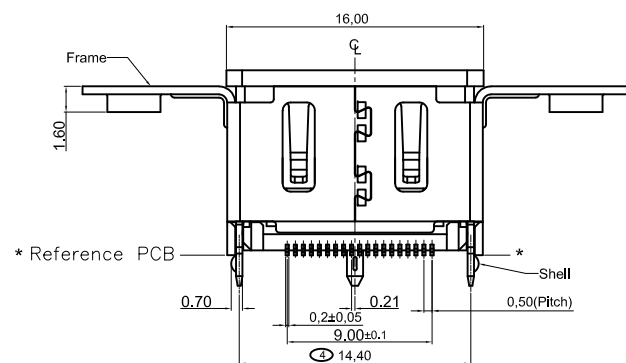
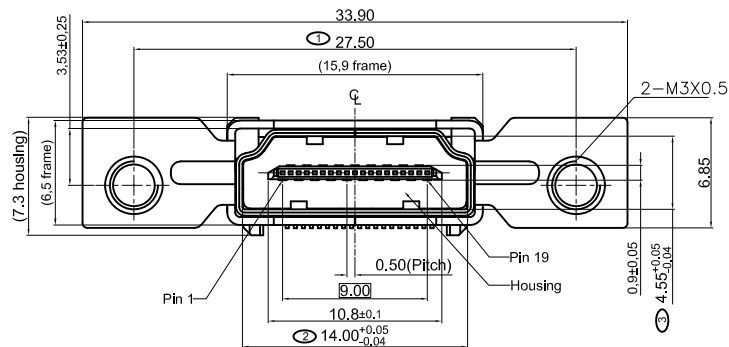


RECOMMENDED PCB LAYOUT (TOP VIEW)
THICKNESS=1.6mm TOLERANCE:±0.05

NOTE :

- 1.MATERIALS AND FINISHED
HOUSING: LCP UL 94V-0
CAP: LCP UL 94V-0
CONTACT: BRASS,SELEVITE GOLD FINISHED
SHELL: BRASS, NICKEL PLATED
FRAME: SPCC,NICKEL PLATED
- 2.ELECTRICAL CHARACTERISTICS
CURRENT RATING: 0.5 AMP
VOLTAGE RATING: 40V AC
CONTACT RESISTANCE: 20 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 500V AC MIN.
INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
- 3.MECHANICAL
MATING FORCE: 4.5Kgf MAX.
UNMATING FORCE: 1.0 Kgf MIN
- 4.ENVIRONMENTAL
TEMPERATURE RATING : -40°C ~ +100°C

※ SIGN “(X)” IS IMPORTANCE DIMENSION

KHD0111-20HM0001-XXX

端子电镀:

- 001=镀半金雾锡1u”
- 002=镀半金雾锡3u”
- 003=镀半金雾锡5u”
- 004=镀半金雾锡15u”
- 005=镀半金雾锡30u”

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

HDMI A TYPE 直立式
10.5高 铜壳镀镍 带支架 端子G/F

單位 : mm



繪圖

設計

審核

核准

比例:

DRAWING

DESIGNED

CHECKED BY APPROVAL BY

料號:KHD0111-20HM0001-XXX
PART NUMBER

公差 : .X ±0.35
.XX ±0.25
.XXX ±0.15

JOHNY

JOHNY

LUKE

JAMES

圖號:KHD0111-20HM0001-XXX-1
DRAWING NO

版本

修改事項

修改日期

日期: 2017/5/8

版本: REV. 0