

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS

- 1-1. CURRENT RATING: 0.5 AMP
- 1-2. VOLTAGE RATING: 40 V
- 1-3. CONTACT RESISTANCE: 30MILLIOHMS MAX
- 1-4. INSULATION RESISTANCE:100M MIN.@500V DC
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE : 4.5KGF MAX.
- 2-2. WITHDRAWING FORCE : 1KGF ~ 4KGF.

3. LIFE TEST: 10000 CYCLES

4. OPERATING TEMPERATURE: -25°C TO +85°C

5. PART NO. DESCRIPTION:

HDMI 直立式成品料號

KHD13-1021 X 11

CONTACT FINISH

- 1.SELECTIVE GOLD 1U"
- 2.SELECTIVE GOLD 3U"
- 3.SELECTIVE GOLD 10U"
- 4.SELECTIVE GOLD 15U"

※ SIGN “(X)” IS IMPORTANCE DIMENSION






D	DUST COVER	1	LCP E130i UL94V-0 BLACK
C	SHELL	1	C2680R-H Ni 50u" T=0.4mm PLATING ALL OVER
B	TERMINAL	19	C2680R-H SEE PART NO.
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

HDMI SMT直立式銅壳鍍銀10.5高
脚長1.9 端子半金霧錫

單位 : mm	繪圖	設計	審核	核准	料號:KHD13-1021X11
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KHD13-1021X11-1
日期 : 2021/3/5					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0

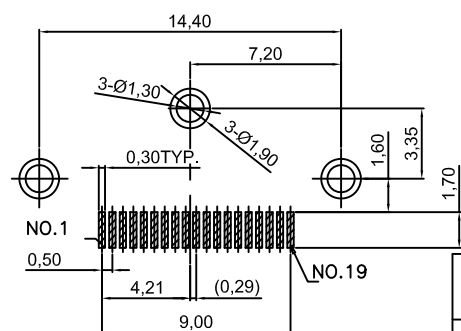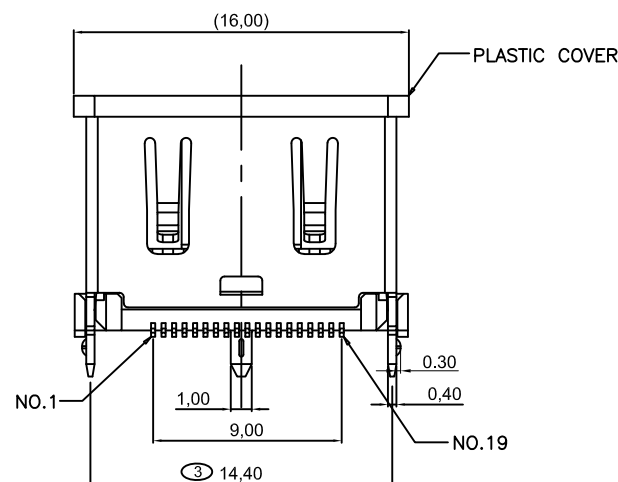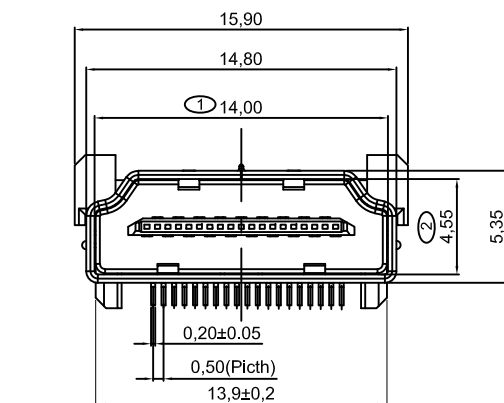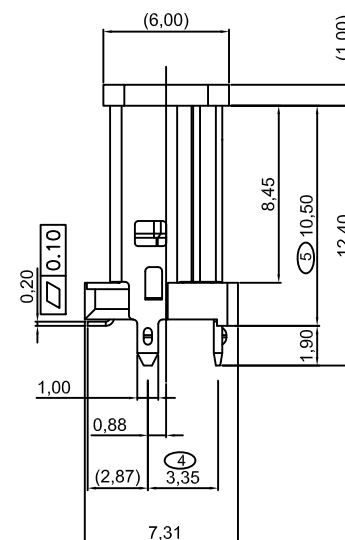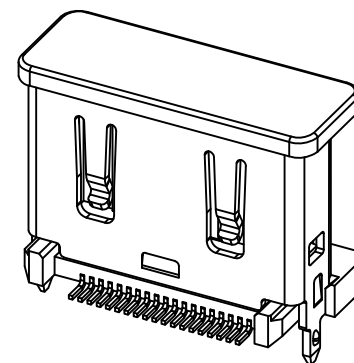

RECOMMENDED PCB LAYOUT THICKNESS=1.6mm
TOLERANCE:±0.05