
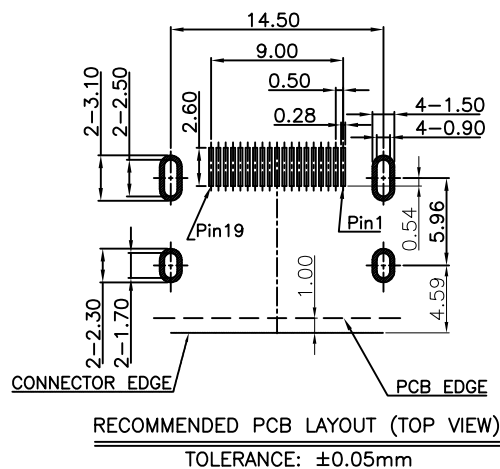


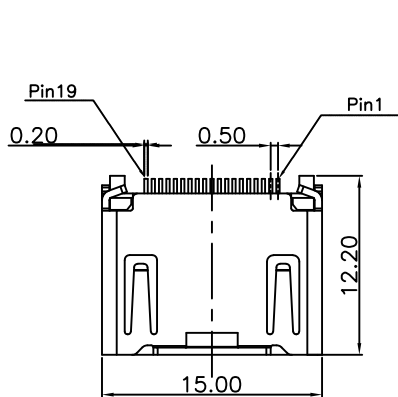

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS



- 1-1. CURRENT RATING: 0.5 AMP
- 1-2. VOLTAGE RATING: 40 V
- 1-3. CONTACT RESISTANCE: 30MILLIOHMS MAX
- 1-4. INSULATION RESISTANCE: 100M MIN. @ 500V DC
- 1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE

2. MECHANICAL CHARACTERISTICS:


- 2-1. INSERTION FORCE : 4.5KGF MAX.
- 2-2. WITHDRAWING FORCE : 1KGF ~ 4KGF.

3. LIFE TEST: 10000 CYCLES

4. OPERATING TEMPERATURE: -25°C TO +85°C

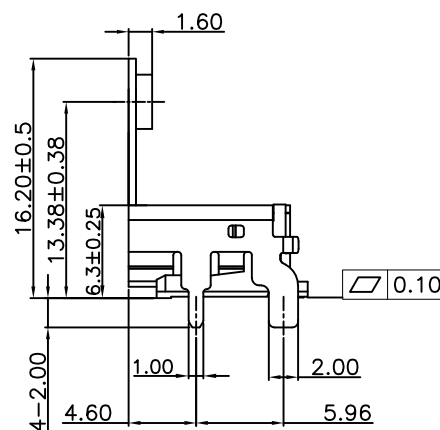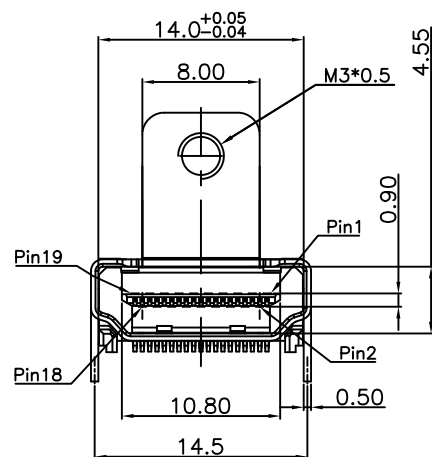

C	SHELL	1	C2680R-H T=0.5mm, Ni 50u" PLATING ALL OVER
B	TERMINAL	19	C2680R-H SEE PART NO.
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR



版本	修改事項	修改日期

KEM 奇速科技有限公司 Qi-Speed Technology CO., LTD.				產品名稱: PRODUCT NAME HDMI SMT MD式銅壳鍍銀 四直脚正反彈片 側模印 脚長2.0 螺孔高13.38 胶无柱 端子半金鍍錫1u"	
單位: mm	繪圖	設計	審核	核准	料號: KHD18-111A02-500
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38	JOHNY	JOHNY	LUKE	JAMES	圖號: KHD18-111A02-500-1
.XX ±0.25					DRAWING NO
.XXX ±0.15					版本: REV. 0
日期: 2021/3/5					