
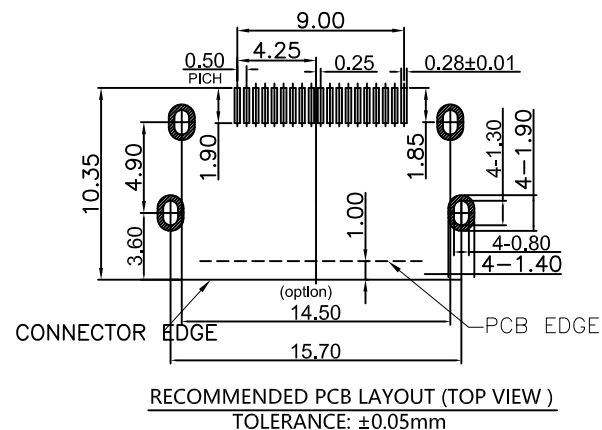


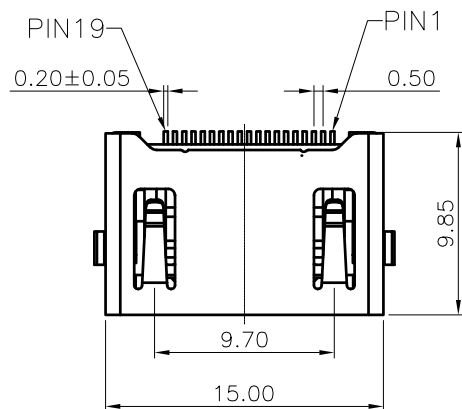

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS

1-1. CURRENT RATING: 0.5 AMP

1-2. VOLTAGE RATING: 40 V

1-3. CONTACT RESISTANCE: 30MILLIOHMS MAX

1-4. INSULATION RESISTANCE: 100M MIN. @ 500V DC

1-5. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE

2. MECHANICAL CHARACTERISTICS:

2-1. INSERTION FORCE : 4.5KGF MAX.

2-2. WITHDRAWING FORCE : 1KGF ~ 4KGF.

3. LIFE TEST: 10000 CYCLES

4. OPERATING TEMPERATURE: -25°C TO +85°C

※ SIGN “(X)” IS IMPORTANCE DIMENSION




PART NO.:

KHDG3168-031001 01

①

①Contact area plated:

01: 3u" Au on contact area 接觸區域鍍金3u"

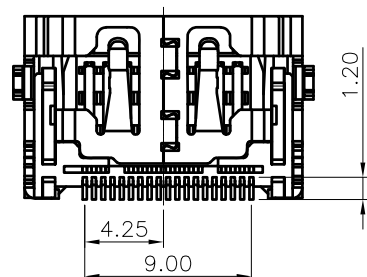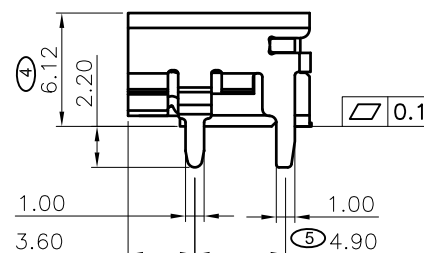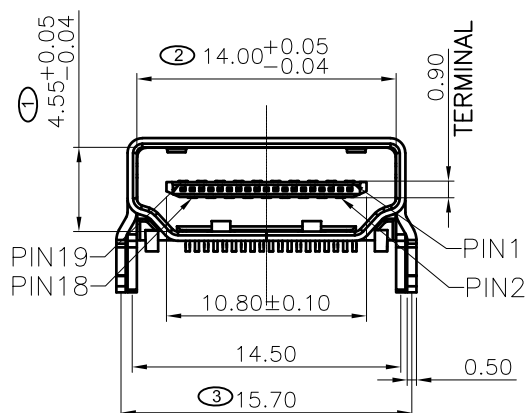

C	SHELL	1	C2680R-H AU T=0.5mm PLATING ALL OVER
B	TERMINAL	19	C2680R-H SEE PART NO.
A	HOUSING	1	LCP E130i UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
HDMI Slim短体铜壳镀金
两直脚两K脚(宽脚)四弹片,端子镀金3u"

單位 : mm	繪圖	設計	審核	核准	料號:KHDG3168-03100101
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KHDG3168-03100101-1
日期 : 2021/10/25					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0