

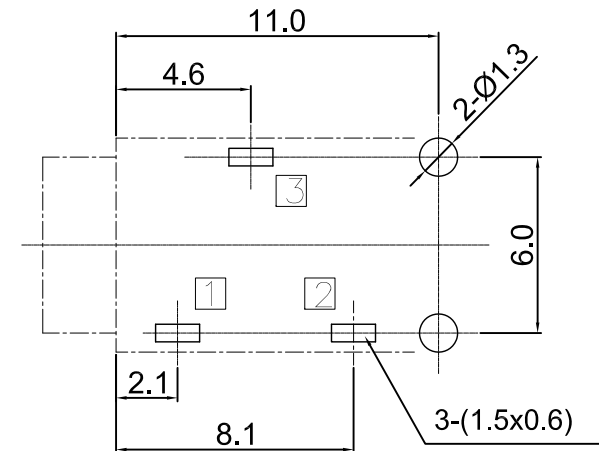
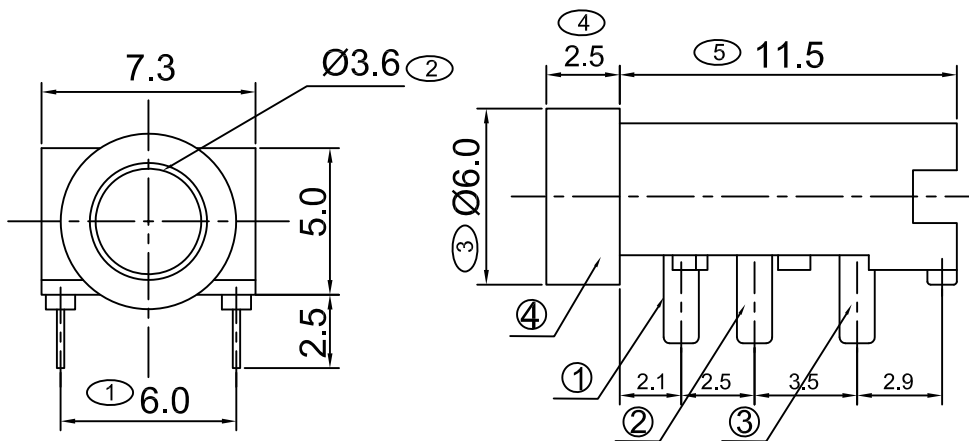




P. C. B Layout (Copper-sided view)

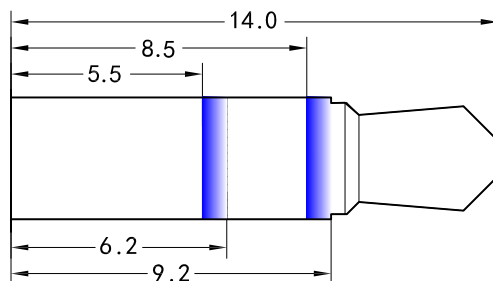

SPECIFICATION

1. Rating : DC 12V 1A;
2. Contact resistance: $\leq 30\text{m}\Omega$;
3. Insulation resistance: $\geq 100\text{M}\Omega$;
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

※ SIGN “(X)” IS IMPORTANCE DIMENSION

④	基座HOUSING	1	PBT	黑色BLACK
③	3#脚CONCAT	1	磷铜	镀锡Sn-Plating
②	2#脚CONCAT	1	磷铜	镀锡Sn-Plating
①	1#脚CONCAT	1	磷铜	镀锡Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
Ø3.5 PHONE JACK

版本	修改事項	修改日期	單位: mm	繪圖 DRAWING	設計 DESIGNED	審核 CHECKED BY	核准 APPROVAL BY	料號: KPJD-30090-3.5 PART NUMBER
			比例:	JOHNY	JOHNY	LUKE	JAMES	圖號: KPJD-30090-3.5-1 DRAWING NO
			公差: .X ±0.38 .XX ±0.25 .XXX ±0.13					版本: REV. 0
			日期: 2022/11/8					