




SCHEMATIC



SPECIFICATION


- 1. Rating : DC 30V 1.0A;
- 2. Contact resistance : $\leq 0.03 \Omega$;
- 3. Insulation resistance : $\geq 100M \Omega$ (DC250V);
- 4. Withstand voltage : 500VAC ;
- 5. Insertion and extraction force : 3-20N;
- 6. life test : 5,000 cycles.

* SIGN "⊗" IS IMPORTANCE DIMENSION

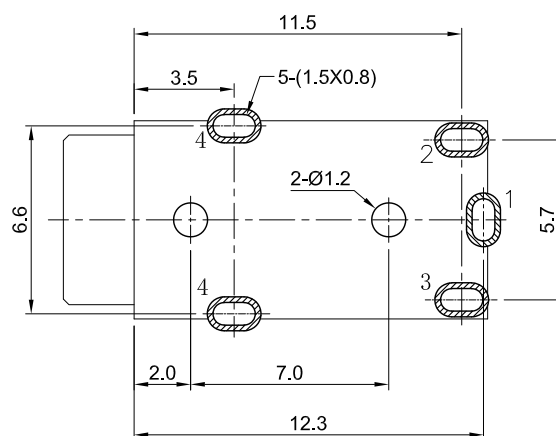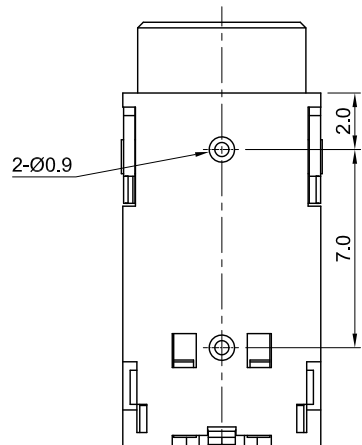

P. C. B LAYOUT
TOP VIEW

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	HOUSING	1	PA9T	
4	4# CONTACT FOOT	1	BRONZE	Ag-Plating
3	3# CONTACT FOOT	1	BRASS	Ag-Plating
2	2# CONTACT FOOT	1	BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	BRONZE	Ag-Plating

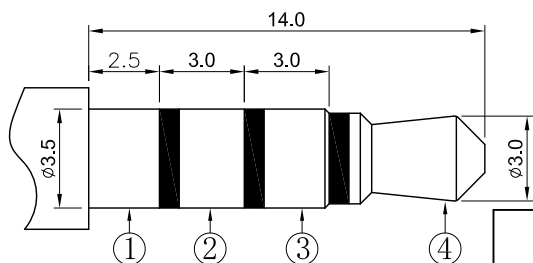

Ø3.50mm 4 POLE PLUG

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
PHONE JACK

單位 : mm	繪圖	設計	審核	核准	料號: KPJD-322-3.5 PART NUMBER
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KPJD-322-3.5-1 DRAWING NO
日期: 2022/2/21					版本: REV. 0

版本	修改事項	修改日期