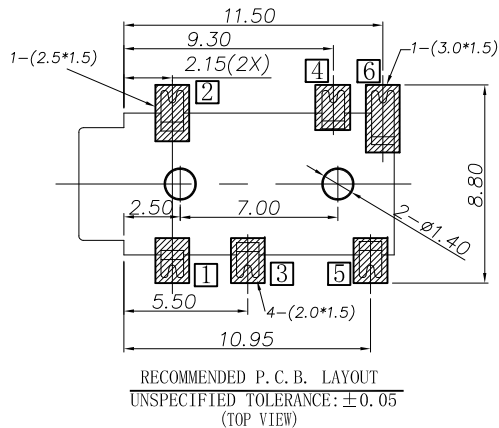
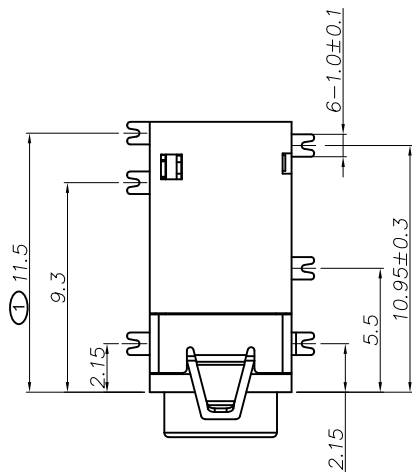



Specification:

1. Rating : DC 30V 0.5A.
2. Contact resistance: ≤50mΩ.
After test: ≤100mΩ.
3. Insulation resistance: ≥100MΩ (500VDC).
After test: ≥50MΩ.
4. Withstanding voltage: 500VAC.
5. Insertion and extraction force: 3N~30N.
6. Life test: 5000cycles min.
7. Operation temperature range: -20°C ~ 70°C.
8. Preservative temperature range: -40°C ~ 85°C.

※ SIGN “(X)” IS IMPORTANCE DIMENSION

Model No. X=	I	J	M
Schematic			

⑦	Housing	1	PA10T UL94 V-0	BLACK
⑥	Shunt terminal	⑥	PHOSPHONR BRONZE T=0.2	Plating Ag
⑤	Shunt terminal	⑤	PHOSPHONR BRONZE T=0.2	Plating Ag
④	Tip spring	④	PHOSPHONR BRONZE T=0.2	Plating Ag
③	Ring B spring	③	PHOSPHONR BRONZE T=0.2	Plating Ag
②	Ring A spring	②	PHOSPHONR BRONZE T=0.2	Plating Ag
①	Earth spring	①	PHOSPHONR BRONZE T=0.2	Plating Ag
項目 ITEM	描述 DESCRIPTION	数量 Q'TY	材 质 MATERIAL	备注 REMARK

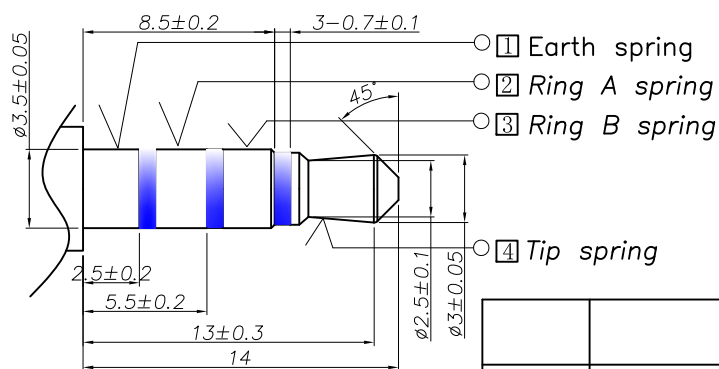

Matching Plug

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
Ø3.5 PHONE JACK

單位: mm	繪圖	設計	審核	核准	料號: KPJS-32660-X-3.5
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNNY	JOHNNY	LUKE	JAMES	圖號: KPJS-32660-X-3.5-1
日期: 2020/6/17					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0