

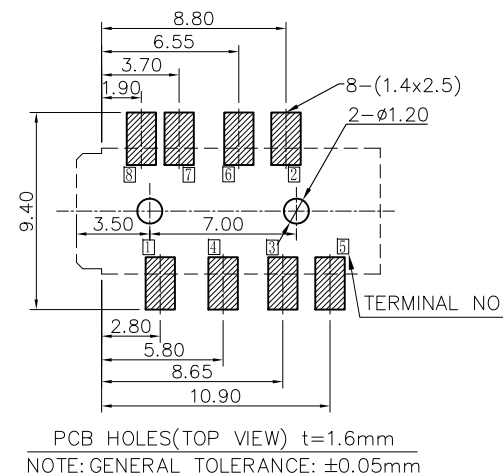
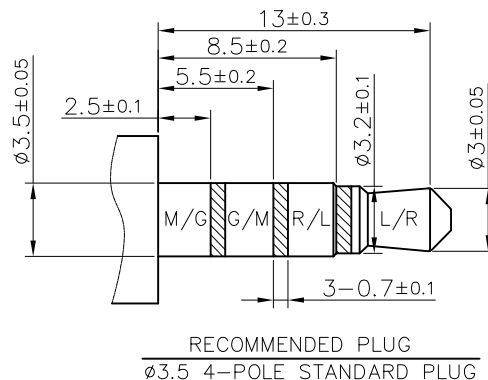
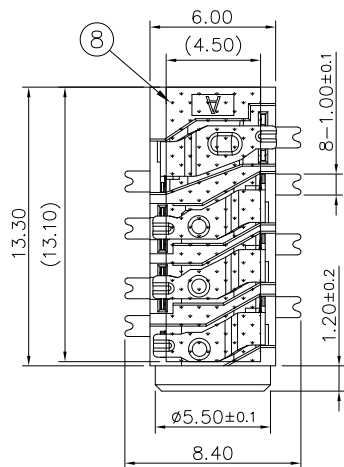




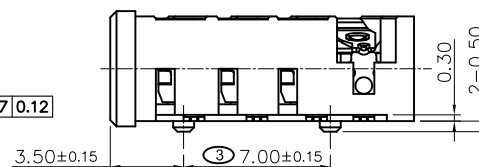


- Specification:
- Rating : DC 30V 0.5A.
 - Contact resistance: $\leq 50\text{m}\Omega$.
After life test: $\leq 100\text{m}\Omega$.
 - Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC).
After life test: $\geq 50\text{M}\Omega$.
 - Withstand voltage: 500VAC.
 - Insertion and extraction force:
3N~30N(Initial).
3N~30N(After Life Test).
 - life test: 5000cycles min.
 - Operation temperature range: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.
 - Preservative temperature range: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$.

※ SIGN "X" IS IMPORTANCE DIMENSION

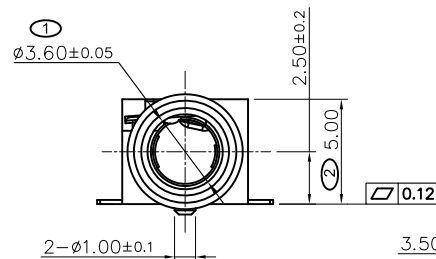

⑧ MYLAR	1	Polyimide	---
⑦ SHUNT TERMINAL	⑧ 1	C5191R-H, T=0.20	Silver plating
⑥ SHUNT TERMINAL	⑥ 7 2	C5191R-H, T=0.20	
⑤ SHUNT TERMINAL	⑤ 1	C5191R-H, T=0.20	
④ RING SPRING	③ ④ 2	SUS301R-1/2H, T=0.20	
③ TIP SPRING	② 1	SUS301R-1/2H, T=0.20	
② Earth spring	① 1	SUS301R-1/2H, T=0.20	X: BLACK/RED/GREEN
① Housing	1	PA10T	
NO.	DESCRIPTION	QTY	REMARK

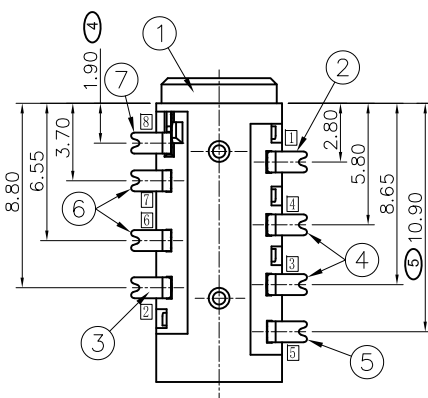

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
ø3.5 PHONE JACK

單位 : mm	繪圖	設計	審核	核准	料號: KPJS-3281B-Q-3.5-X
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.50 .XX ±0.30 .XXX ±0.15	JOHNY	JOHNY	LUKE	JAMES	圖號: KPJS-3281B-Q-3.5-X-1
版本	修改事項	修改日期	日期: 2017/3/9		DRAWING NO
					版本: REV. 0