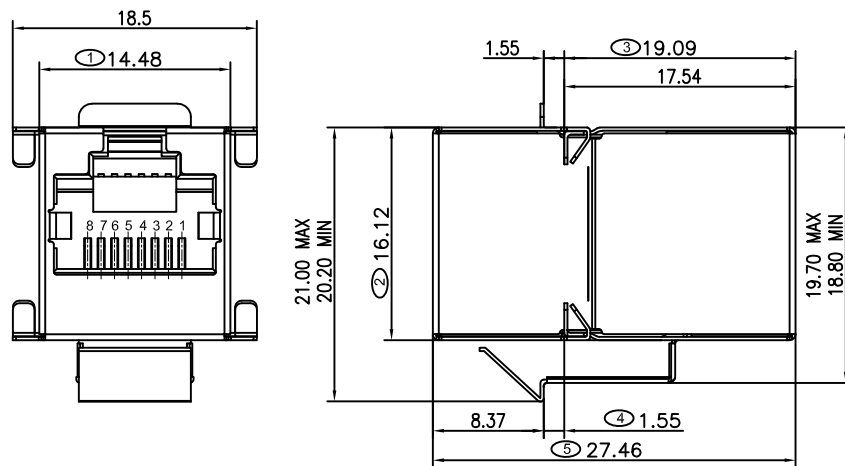


Front Panel Jack Only Clearance
W/O Latch Feature

NOTES MECHANICAL:

1. HOUSING MATERIAL: PBT BLACK UL94V-0
2. INSERT MATERIAL: PBT BLACK UL94V-0
3. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.35mm.
4. PLATING: GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100u" MIN, NICKEL 30u" MIN. OVER ALL
5. SHIELD: STAINLESS STEEL T=0.25mm.
6. OPERATING LIFE: 750 CYCLES MIN.
7. MATING/UNMATING FORCE: 30N/3.06KGf MAX
8. RETENTION STRENGTH: 50N MIN. FOR 60S±5S

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE : 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC .
5. DIELECTRIC STRENGTH: 1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.

ENVIRONMENTAL:

1. STORAGE: -40°C TO +85°C RELATIVE HUMIDITY<80%.
2. OPERATION: -40°C TO +85°C.

※ SIGN "X" IS IMPORTANCE DIMENSION

Wiring
diagram:

1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
S	S

Panel Thickness 1.60mm

Single Panel-Latch Clearance

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

180度 Cat5e 屏蔽卡扣直通
屏蔽彈片

單位 : mm	繪圖	設計	審核	核准	料號: KRJ-11007-8806-C
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KRJ-11007-8806-C-1 DRAWING NO
日期 : 2021/12/29					版本: REV. 0

版本	修改事項	修改日期