
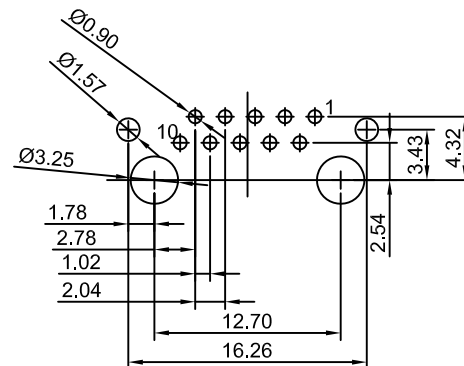

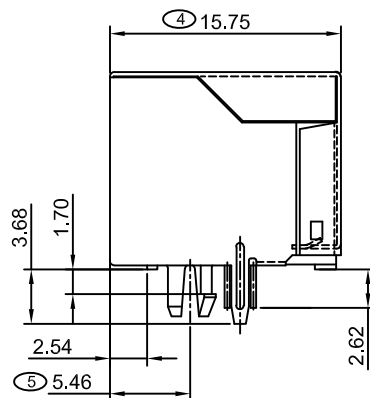


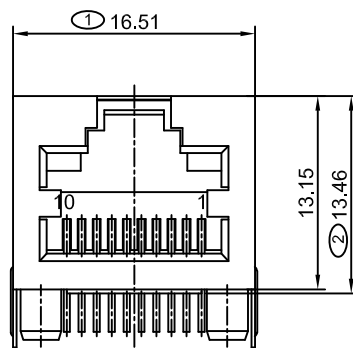

NOTES

MATERIAL

1. HOUSING MATERIAL : PBT BLACK UL94V-0
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
3. PLATING : CONTACT AREA-SELECTIVE GOLD PLATING, TAILS PLATING TIN OVER NICKEL.
4. SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1. DURABILITY : 750 CYCLES MIN.
2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40℃~+85℃.
2. OPERATION : -20℃~+70℃.

※ SIGN "X" IS IMPORTANCE DIMENSION

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
RJ45 JACK 1X1

單位 : mm	繪圖	設計	審核	核准	料號:KRJ-11011-108XX-C
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38	JOHNY	JOHNY	LUKE	JAMES	圖號:KRJ-11011-108XX-C-1
.XX ±0.25					DRAWING NO
.XXX ±0.13					版本: REV. 0
日期 : 2017/11/1					

版本	修改事項	修改日期