
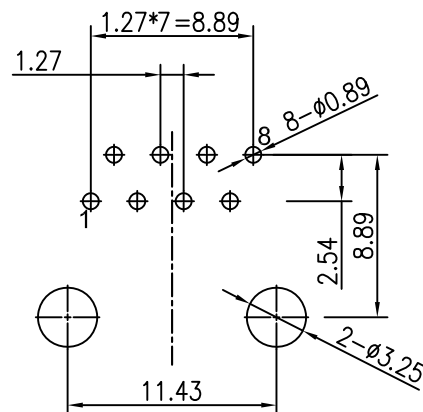
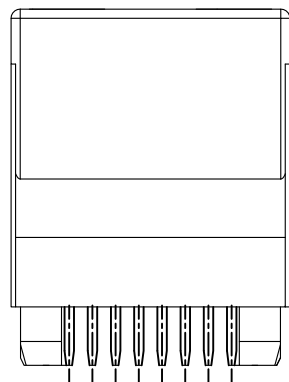
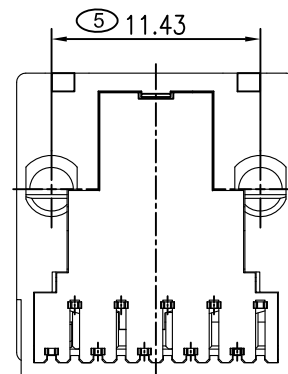
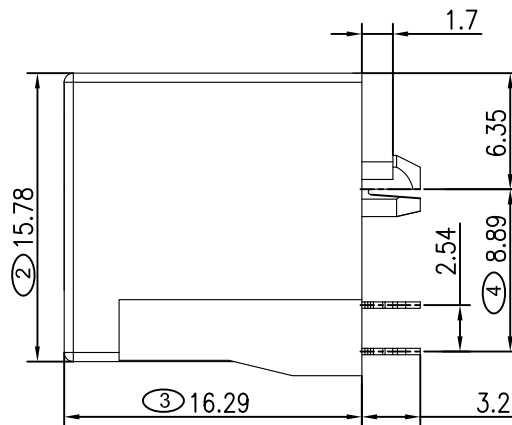


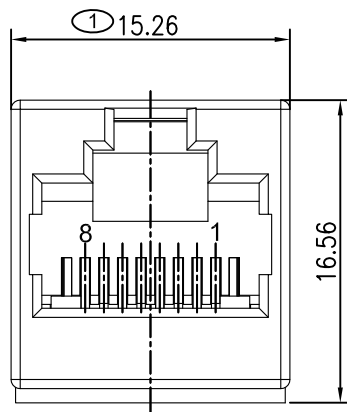

P.C.B LAYOUT TOP VIEW

NOTES

MECHANICAL:

1. HOUSING MATERIAL: PBT BLACK UL94V-0
2. INSERT MATERIAL: PBT BLACK UL94V-0
3. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.35mm.
4. PLATING: GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL 100u" MIN, NICKEL 30u" MIN. OVER ALL
5. OPERATING LIFE: 750 CYCLES MIN.
6. MATING/UNMATING FORCE: 30N/3.06KGf MAX
7. RETENTION STRENGTH: 50N MIN. FOR 60S±5S

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE : 30mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC .
5. DIELECTRIC STRENGTH: 1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.

ENVIRONMENTAL:

1. STORAGE: -40℃ TO +85℃ RELATIVE HUMIDITY<80%.
2. OPERATION: -40℃ TO +85℃.

* SIGN "ⓧ" IS IMPORTANCE DIMENSION

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

RJ45 JACK 1X1 8P8C 全塑
无边 黑色PBT

單位: mm



繪圖
DRAWING

設計
DESIGNED

審核
CHECKED BY

核准
APPROVAL BY

料號: KRJ-11059-8806-C
PART NUMBER

比例:

公差: .X ±0.38
.XX ±0.25
.XXX ±0.13

JOHNY

JOHNY

LUKE

JAMES

圖號: KRJ-11059-8806-C-1
DRAWING NO

日期: 2021/7/6

版本: REV. 0

版本

修改事項

修改日期