


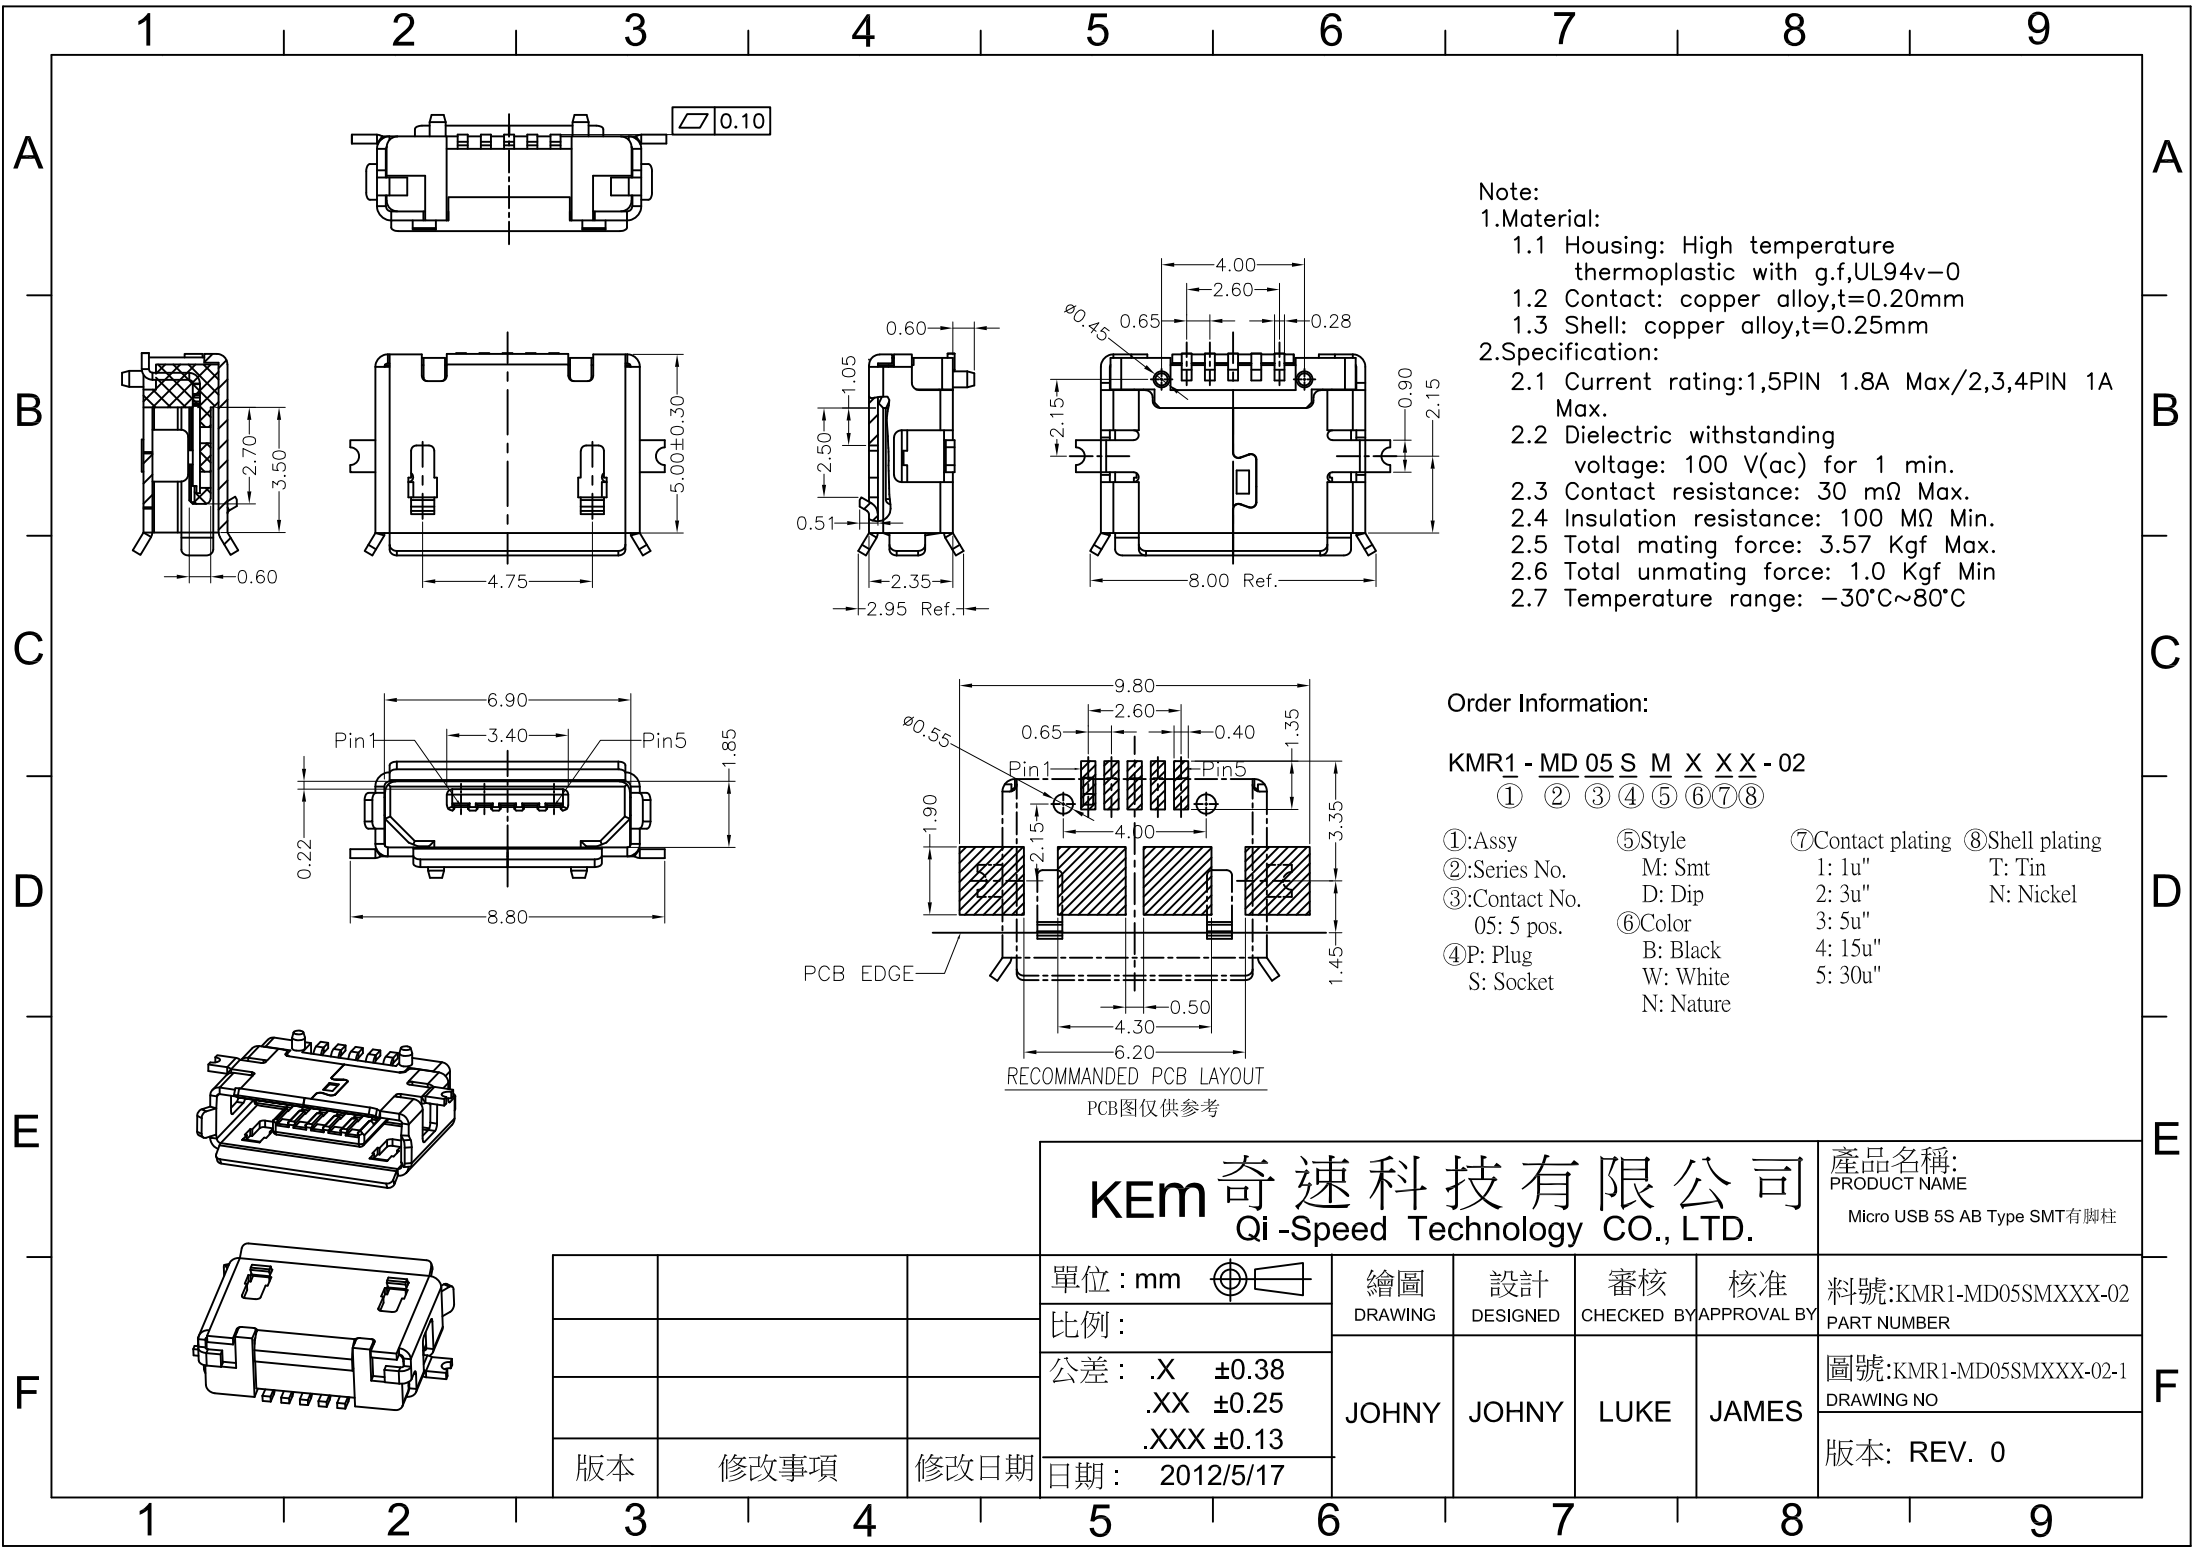

Note:

1.Material:

1.1 Housing: High temperature thermoplastic with g.f,UL94v-0

1.2 Contact: copper alloy,t=0.20mm

1.3 Shell: copper alloy,t=0.25mm

2.Specification:

2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.

2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 100 MΩ Min.

2.5 Total mating force: 3.57 Kg Min.

2.6 Total unmating force: 1.0 Kg Min

2.7 Temperature range: -30°C~80°C

Order Information:

KMR1 - MD 05 S M X X X - 02

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

①:Assy ⑤Style ⑦Contact plating ⑧Shell plating

②:Series No. M: Smt 1: 1u"

③:Contact No. D: Dip 2: 3u"

05: 5 pos. ⑥Color 3: 5u"

④P: Plug B: Black 4: 15u"

S: Socket W: White 5: 30u"

N: Nature

KEM 奇速科技有限公司 Qi-Speed Technology CO., LTD.				產品名稱: PRODUCT NAME Micro USB 5S AB Type SMT有脚柱	
單位 : mm	繪圖 DRAWING	設計 DESIGNED	審核 CHECKED BY	核准 APPROVAL BY	料號:KMR1-MD05SMXXX-02 PART NUMBER
比例:	JOHNY	JOHNY	LUKE	JAMES	圖號:KMR1-MD05SMXXX-02-1 DRAWING NO
公差: .X ±0.38 .XX ±0.25 .XXX ±0.13					版本: REV. 0
日期: 2012/5/17					