

NOTES:


- MATERIAL:
 - HOUSING:THERMOPLASTIC FLAMMABILITY RATING UL94-O
 - CONTACT:COPPERY ALLOY T=0.15MM
 - SHELL: COPPERY ALLOY T=0.25MM
- FINISH:
 - CONTACT:
 - 3U"MIN,PLATED ON CONTACT AREA
 - G/F PLATING ON SOLDER TAIL AREA
 - 50~80U" NICKEL UNDERPLATING OVERALL
 - SHELL:
 - 80~120U" MATTER TIN PLAING ALL
 - 50~80U" NICKEL UNDERPLATING OVERALL
- SPECIFICATION:
 - CURRENT RATING:0.5A(2.3.4CONTACT)/1.8A (1.5CONTACT)MAX.
 - VOLTAGE:30 VAC
 - TEMPERATURE RANGE:-30°C~85°C
 - CONTACT RESISTANCE:30 MILLIONHM MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE;250VAC R.M.S
 - INSULATION RESISTNACE:100 MEGOHMS MIN

Order Information:

KMR1 - MD 05 S M B 1 N - 038A

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- | | | | |
|---------------|----------|------------------|----------------|
| ①:Assy | ⑤Style | ⑦Contact plating | ⑧Shell plating |
| ②:Series No. | M: Smt | 1: 1u" | T: Tin |
| ③:Contact No. | ⑥Color | 2: 3u" | N: Nickel |
| 05: 5 pos. | B: Black | 3: 5u" | |
| ④P: Plug | W: White | 4: 15u" | |
| S: Socket | | 5: 30u" | |

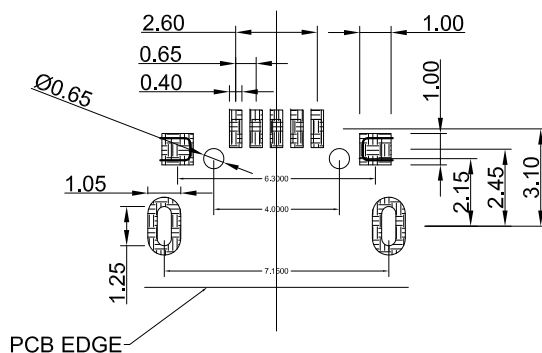

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
MICRO USB 5PIN TYPE DIP 7.15

單位 : mm	繪圖	設計	審核	核准	料號:KMR1-MD05SMB1N-038A
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KMR1-MD05SMB1N-038A-1 DRAWING NO
日期 : 2013/5/20					版本: REV. 0