
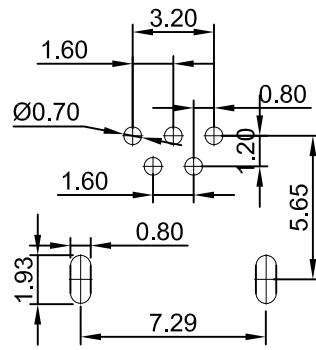

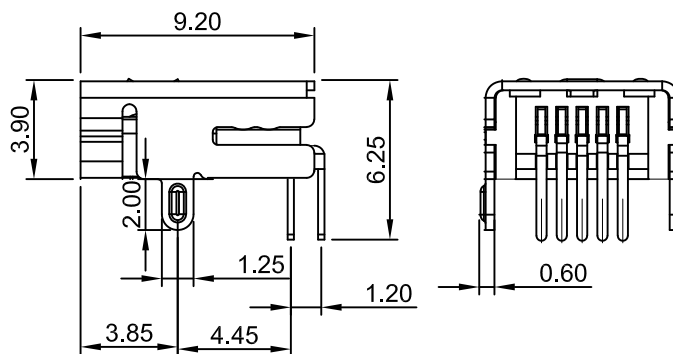
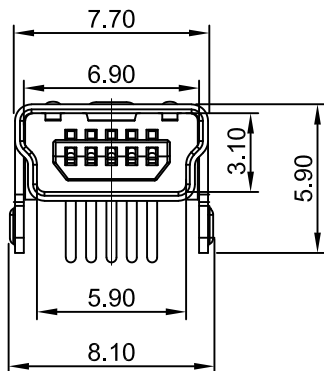





Recommended PCB Layout

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触电阻: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 0.7kgf (MIN)
2. 端子保持力: Terminal Retention
1.0kgf (MIN)

PRODUCT NUMBER CODE

KMBD20 - 5 LK X 1 0

① ② ③ ④ ⑤ ⑥

1. PRODUCT CODE:
KMBD20: MINI USB B TYPE PLUG CONN.
2. POSITIONS:
5: POSITIONS.
3. INSULATOR COLOR OR HOUSING:
L: LCP K: BLACK
4. CONTACT PLATING THICKNESS:
1: CONTACT PLATED G/F IN MATING AREA
2: CONTACT PLATED 30u" IN MATING AREA
5. SHELL PLATING
1: NI PLATING 80u" (MIN)
6. MATERIAL OF CONTACT:
O: BRASS

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

MINI USB 5P 外壳2脚DIP

單位: mm



繪圖

DRAWING

設計

DESIGNED

審核

CHECKED BY

核准

APPROVAL BY

料號: KMBD20-5LKX10

PART NUMBER

圖號: KMBD20-5LKX10-1

DRAWING NO

版本: REV. 0

比例:

公差: .X ±0.38

.XX ±0.25

.XXX ±0.13

日期: 2022/9/5

版本

修改事項

修改日期