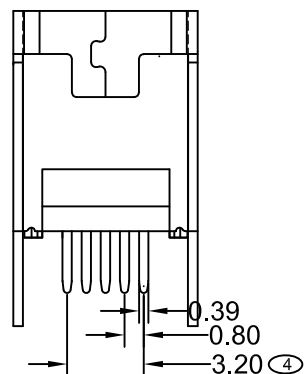

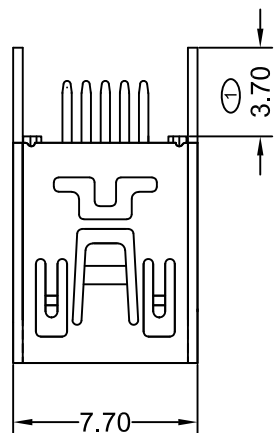


Recommended PCB Layout

电器特性: Electrical Specifications:

1. 额定电流: Current Rating : 1.5A
2. 额定电压: Voltage Rating : 30V DC
3. 接触阻抗: Contact Resistance : 30 milliohms Max
4. 耐电压: Dielectric Withstanding Voltage : 500V AC Sea Level
5. 绝缘阻抗: Insulation Resistance : 100 MEGA ohms MIN

PRODUCT NUMBER

KMBD29 - 5 LK 1 1 0

① ②③ ④⑤⑥

1. PRODUCT CODE:
KMBD29: MINI USB B TYPE PLUG CONN.
2. POSITIONS:
5:5 POSITIONS
3. INSULATOR COLOR OR HOUSING:
L:LCP K:BLACK
4. SHELL PLATING:
1:C2680 NICKEL PLATING
5. CONTACT PLATING THICKNESS:
1:G/F PLATING GOLD IN MATING AREA; TIN ON SOLDER TALLS
6. MATERIAL OF CONTACT:
0:BRASS

* SIGN "X" IS IMPORTANCE DIMENSION

Pin Assignments

Contact NO.	Signal Name	顏色
1	VBUS	紅
2	D-	白
3	D+	綠
4	ID	
5	GND	黑

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
MINI USB 5P/F 180度直插直脚

單位: mm	繪圖	設計	審核	核准	料號:KMBD29-5LK110
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KMBD29-5LK110-1 DRAWING NO
日期: 2022/12/26					版本: REV. 0