
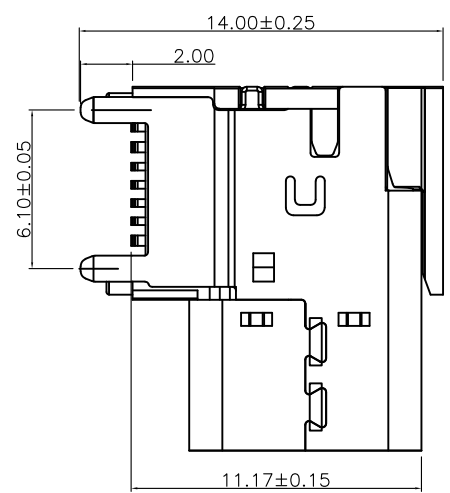
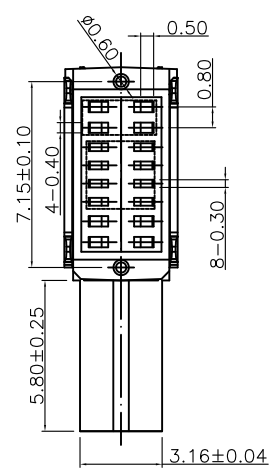
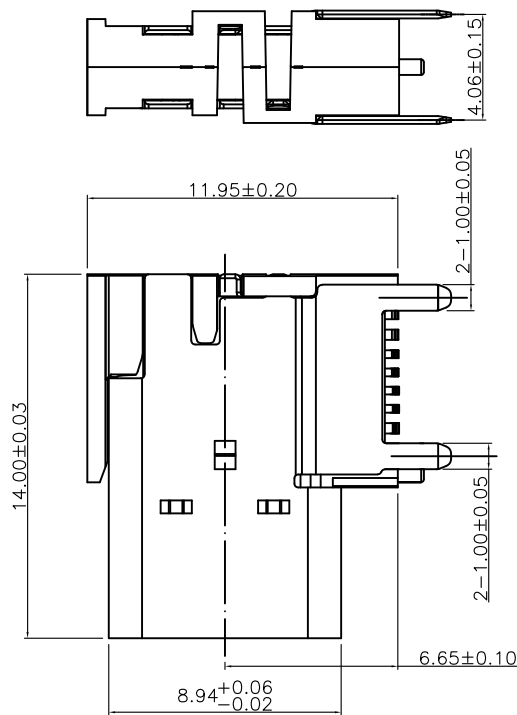


A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

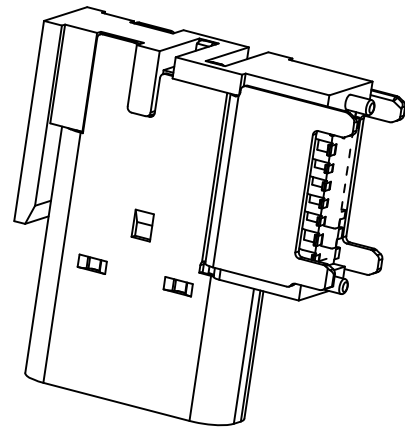

- 特性:
- 一、电气性能: EICTRICAL
1. 额定电流: 5.0A
 2. 接触阻抗: 30 MILLIOHMS MAX
 3. 耐电压: 300V AC / 1 mA MAX
 4. 绝缘阻抗: 250V DC/100 MEGA OHMS MIN
- 二、机械性能:
1. 插入力: 5~20N
 2. 拨出力: 8~20N
 3. 使用寿命: 10000次、拔出力 5N MIN
- 三、材料: MATERIAL
1. 塑胶: LCP黑色 UL94V-0
 2. 端子: C7025 T=0.15MM
 3. 外壳: SUS304 T=0.30MM
 4. 卡勾: SUS304 T=0.15MM
- 四、电镀: FINISH
1. 端子: 接触点镀金G/F MIN
PIN脚焊接区域镀亮锡80U"MIN.
 2. 外壳: 镀镍80U"MIN

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
USB TYPE-C CF 16PIN 侧贴SMT
CH:6.65mm高度

版本	修改事項	修改日期

單位: mm	繪圖	設計	審核	核准
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY
公差: .X ±0.35 .XX ±0.35 .XXX ±0.25	JOHNY	JOHNY	LUKE	JAMES
日期: 2020/12/25				

料號: KUSBC056-F001
PART NUMBER
圖號: KUSBC056-F001-1
DRAWING NO
版本: REV. 0