



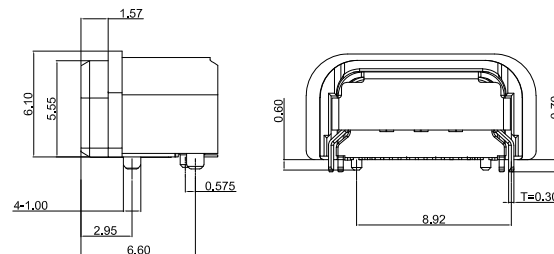


6. Operating Temperature: -30°C TO $+85^{\circ}\text{C}$

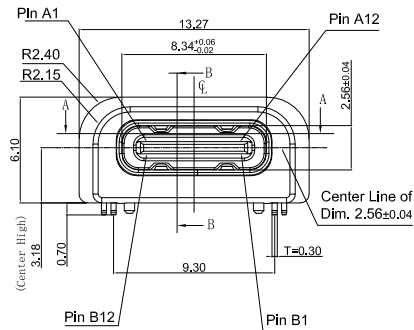

9	UP Terminal	BRASS	Note.2	ISE
8	Down Terminal	BRASS	Note.2	ISE
7	Insulation Jacket	LCP E130i BK UL 94V-0		IPC
6	Down Molding			IPC
5	Up Molding			IPC
4	Second Molding			IPC
3	Mid-Plate	SUS	Note.2	IPC
2	Inner Shell	SUS	Note.2	IPC
1	Outer Shell	SUS	Note.2	IPC
项次 NO.	品名 NAME	材料 MATERIAL	表面处理 PLATING	备注 REMARK

<i>PIN ASSIGNMENT</i>			
<i>PIN NUMBER</i>	<i>SIGNAL NAME</i>	<i>PIN NUMBER</i>	<i>SIGNAL NAME</i>
<i>A1</i>	<i>GND</i>	<i>B12</i>	<i>GND</i>
<i>A2</i>	<i>TX1+</i>	<i>B11</i>	<i>RX1+</i>
<i>A3</i>	<i>TX1-</i>	<i>B10</i>	<i>RX1-</i>
<i>A4</i>	<i>VBUS</i>	<i>B9</i>	<i>VBUS</i>
<i>A5</i>	<i>CC1</i>	<i>B8</i>	<i>SBU2</i>
<i>A6</i>	<i>D+</i>	<i>B7</i>	<i>D-</i>
<i>A7</i>	<i>D-</i>	<i>B6</i>	<i>D+</i>
<i>A8</i>	<i>SBU1</i>	<i>B5</i>	<i>CC2</i>
<i>A9</i>	<i>VBUS</i>	<i>B4</i>	<i>VBUS</i>
<i>A10</i>	<i>RX2-</i>	<i>B3</i>	<i>TX2-</i>
<i>A11</i>	<i>RX2+</i>	<i>B2</i>	<i>TX2+</i>
<i>A12</i>	<i>GND</i>	<i>B1</i>	<i>GND</i>

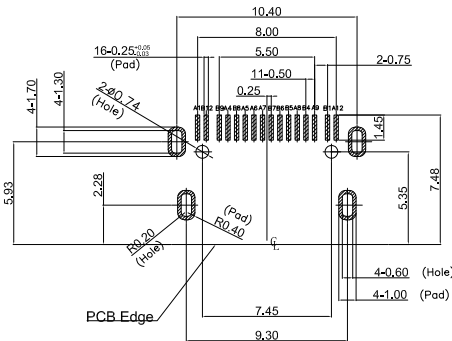

 Pad Area
Top View

版本	修改事項	修改日期

KEm 奇速科技有限公司
Qi-Speed Technology CO., LTD.

版本: REV. 0

單位: mm		繪圖	設計	審核	核准
比例:		DRAWING	DESIGNED	CHECKED BY	APPROVAL BY
公差: .X ±0.30 .XX ±0.25 .XXX ±0.15		JOHNY	JOHNY	LUKE	JAMES
日期: 2017/3/28					