


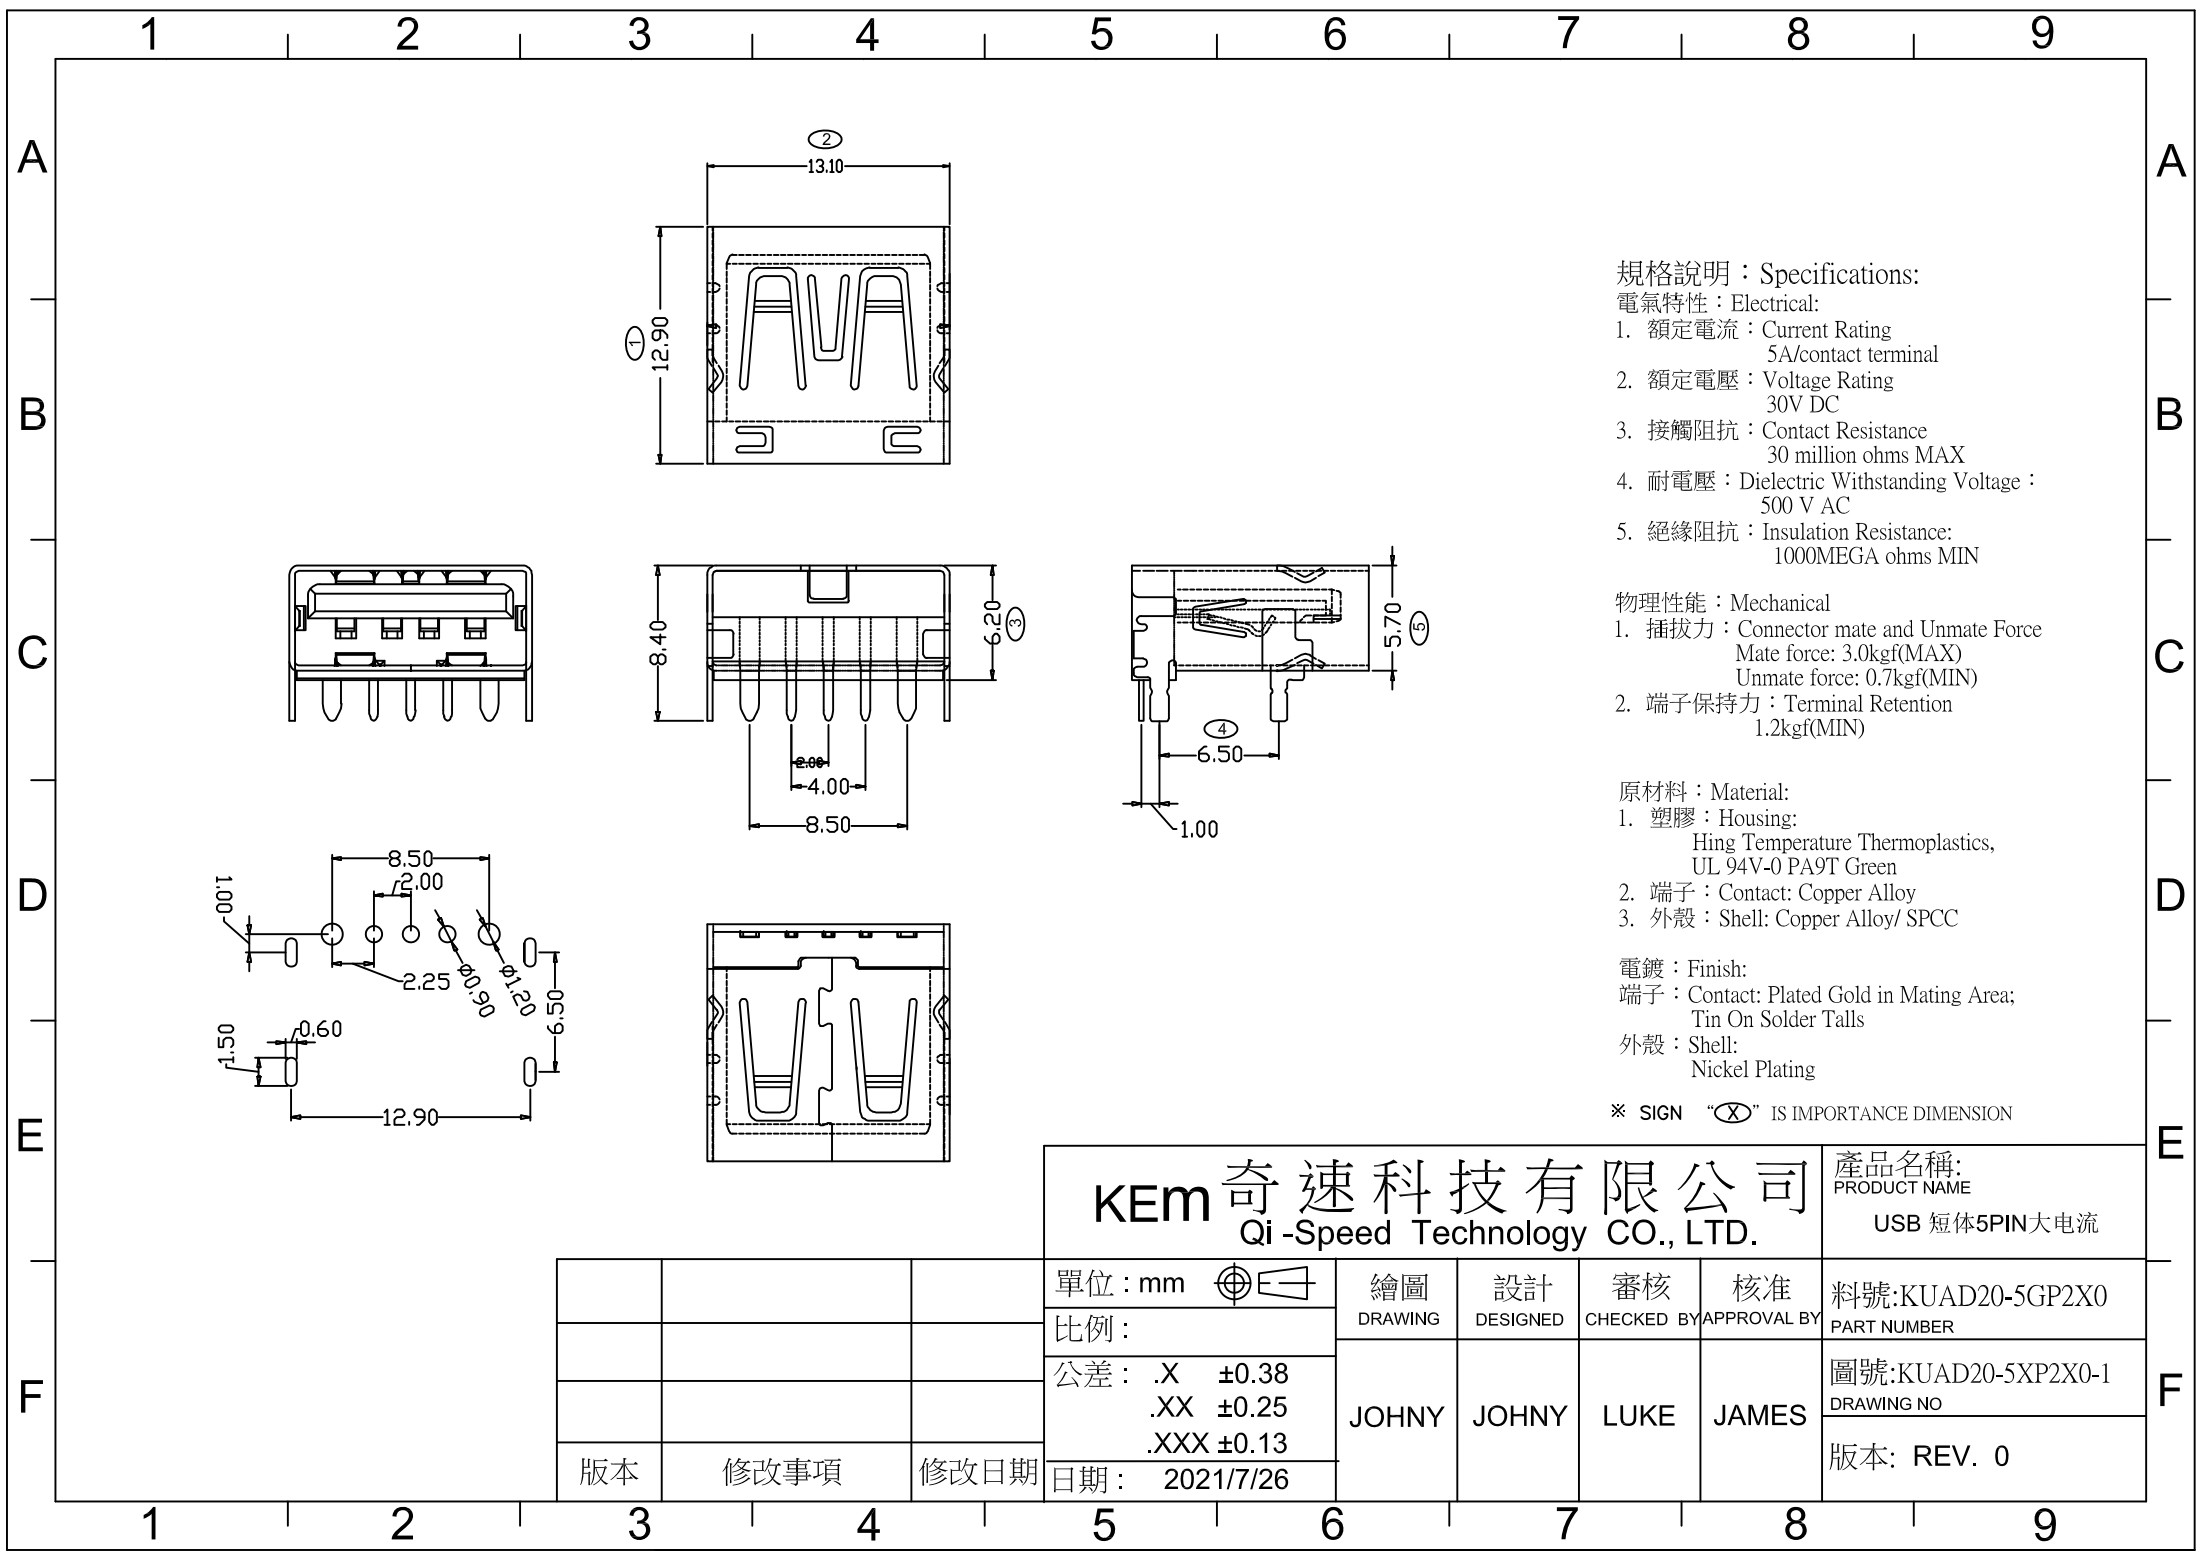

規格說明：Specifications:
電氣特性：Electrical:
1. 額定電流：Current Rating
5A/contact terminal
2. 額定電壓：Voltage Rating
30V DC
3. 接觸阻抗：Contact Resistance
30 million ohms MAX
4. 耐電壓：Dielectric Withstanding Voltage：
500 V AC
5. 絕緣阻抗：Insulation Resistance:
1000MEGA ohms MIN

物理性能：Mechanical
1. 插拔力：Connector mate and Unmate Force
Mate force: 3.0kgf(MAX)
Unmate force: 0.7kgf(MIN)
2. 端子保持力：Terminal Retention
1.2kgf(MIN)

原材料：Material:
1. 塑膠：Housing:
Hing Temperature Thermoplastics,
UL 94V-0 PA9T Green
2. 端子：Contact: Copper Alloy
3. 外殼：Shell: Copper Alloy/ SPCC

電鍍：Finish:
端子：Contact: Plated Gold in Mating Area;
Tin On Solder Tails
外殼：Shell:
Nickel Plating

※ SIGN “⊗” IS IMPORTANCE DIMENSION

KEM奇速科技有限公司				產品名稱: PRODUCT NAME	
Qi-Speed Technology CO., LTD.				USB 短体5PIN大电流	
單位：mm	繪圖	設計	審核	核准	料號:KUAD20-5GP2X0
比例：	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差：.X ±0.38	JOHNY	JOHNY	LUKE	JAMES	圖號:KUAD20-5XP2X0-1
.XX ±0.25					DRAWING NO
.XXX ±0.13					版本: REV. 0
日期：2021/7/26					
版本	修改事項	修改日期			