


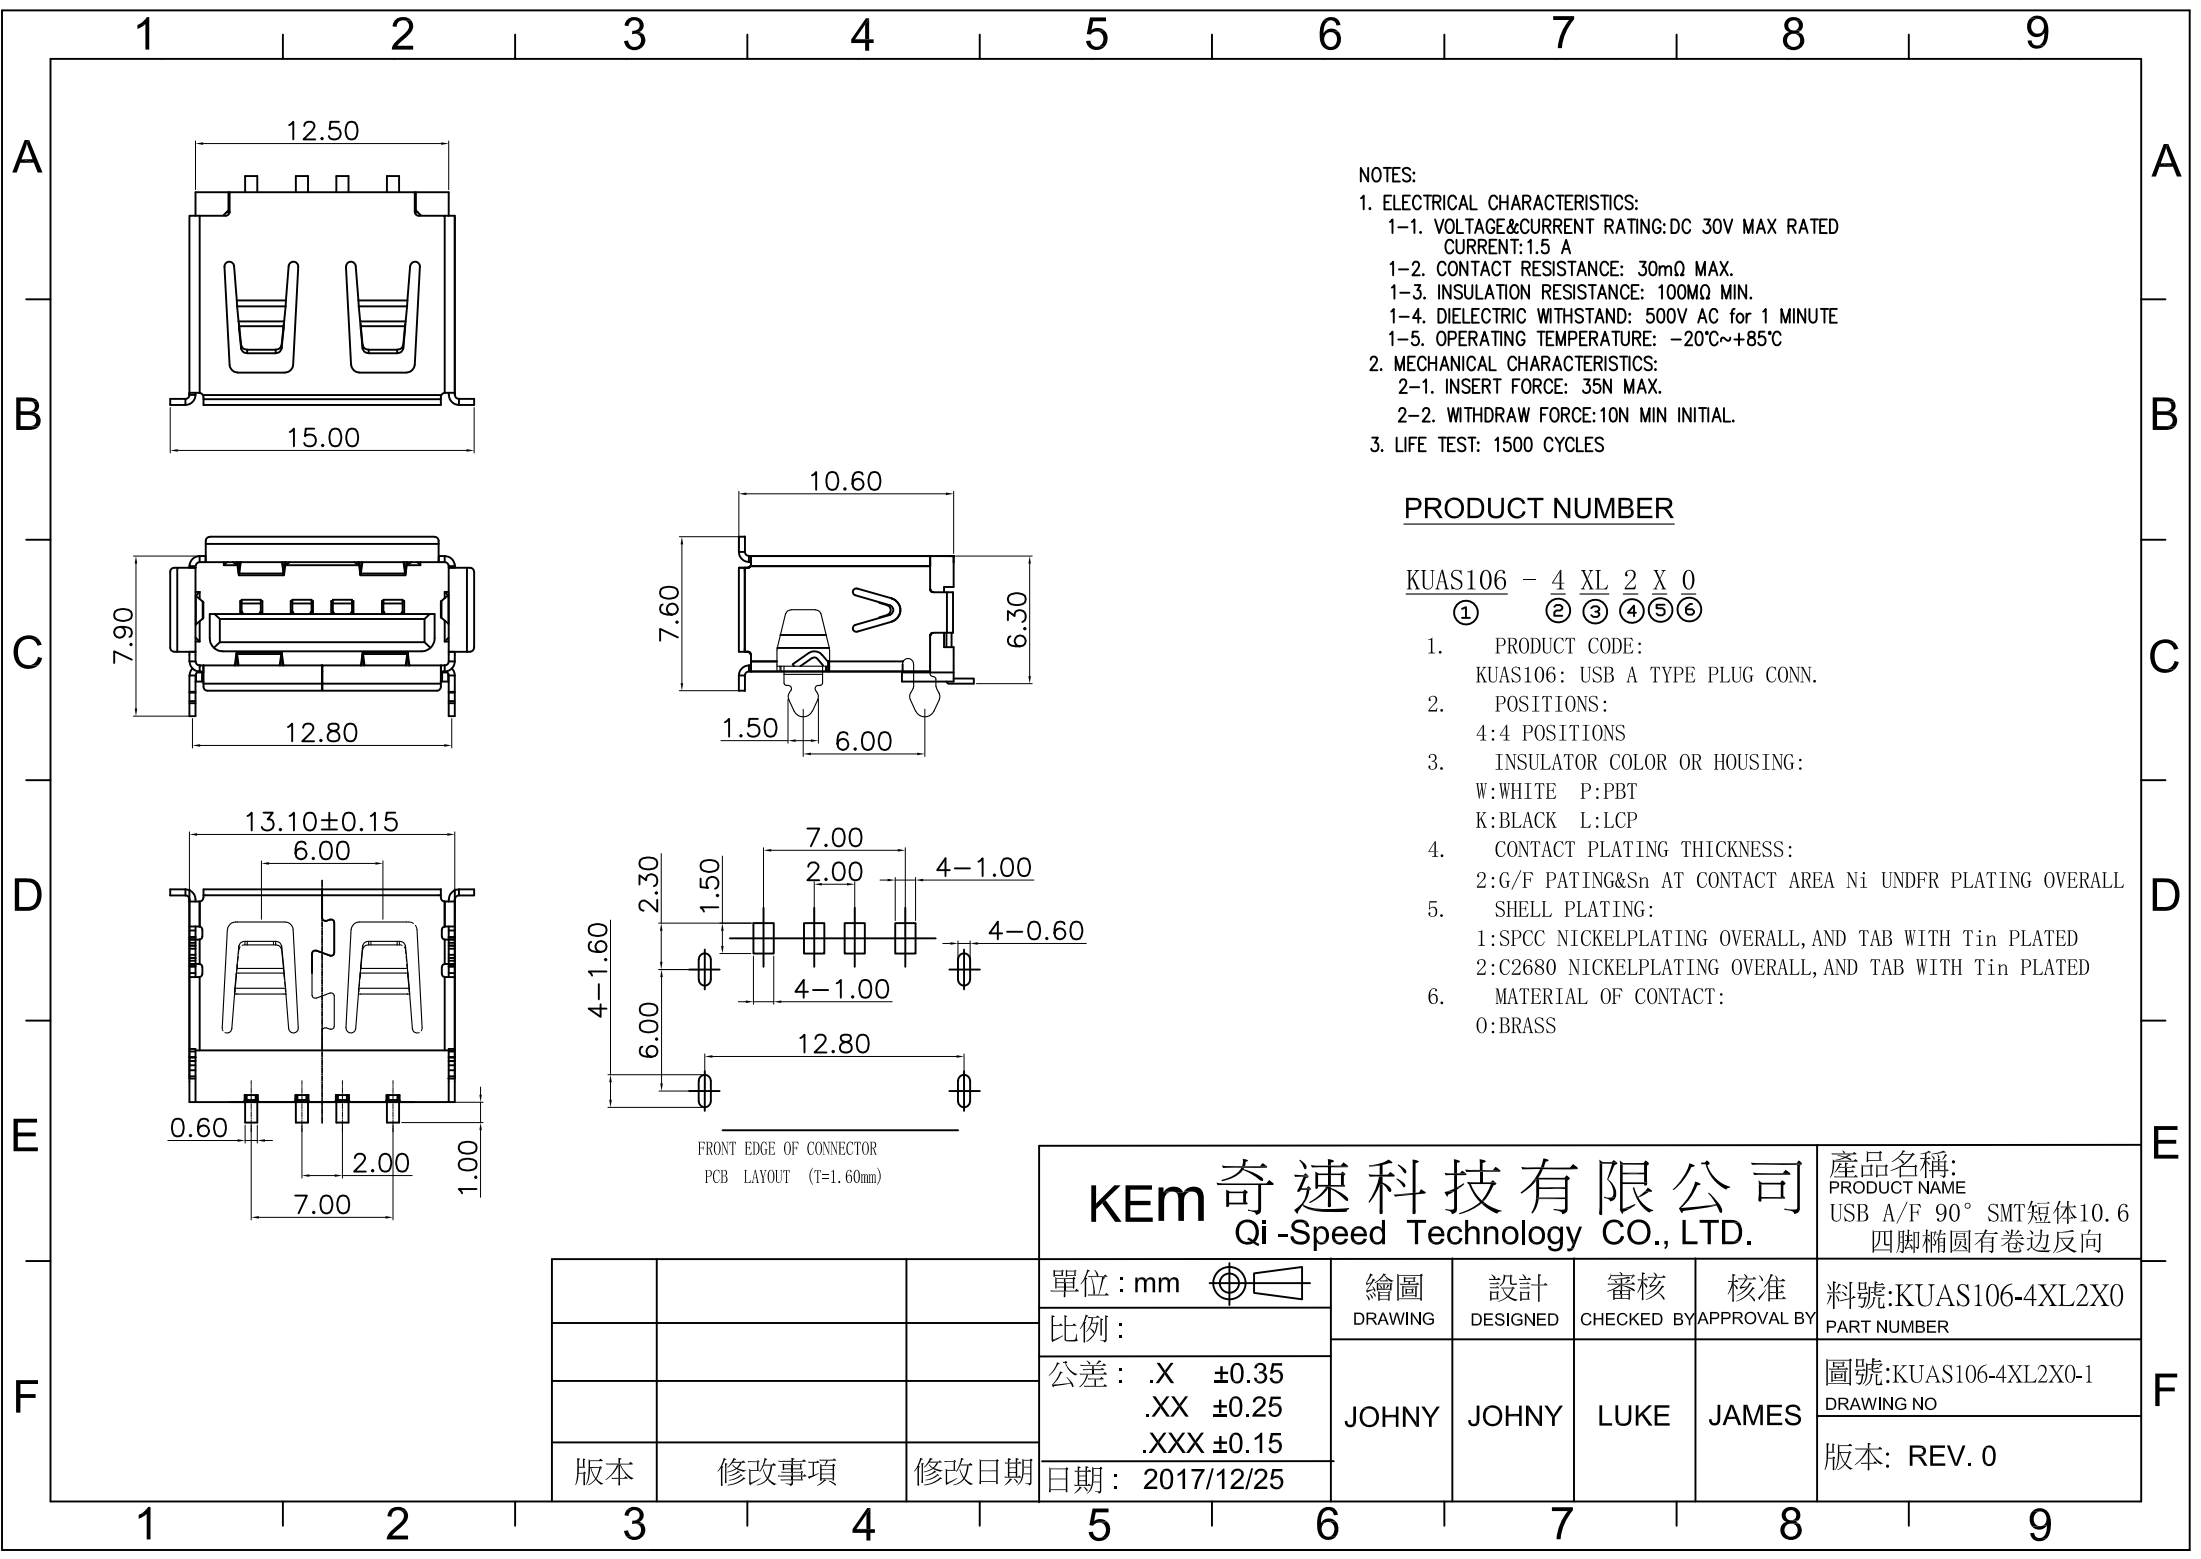

- NOTES:
1. ELECTRICAL CHARACTERISTICS:
 - 1-1. VOLTAGE&CURRENT RATING:DC 30V MAX RATED CURRENT:1.5 A
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX.
 - 1-3. INSULATION RESISTANCE: 100MΩ MIN.
 - 1-4. DIELECTRIC WITHSTAND: 500V AC for 1 MINUTE
 - 1-5. OPERATING TEMPERATURE: -20℃~+85℃
 2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERT FORCE: 35N MAX.
 - 2-2. WITHDRAW FORCE:10N MIN INITIAL.
 3. LIFE TEST: 1500 CYCLES

PRODUCT NUMBER

KUAS106 - 4 XL 2 X 0
① ② ③ ④ ⑤ ⑥

1. PRODUCT CODE:
KUAS106: USB A TYPE PLUG CONN.
2. POSITIONS:
4:4 POSITIONS
3. INSULATOR COLOR OR HOUSING:
W:WHITE P:PBT
K:BLACK L:LCP
4. CONTACT PLATING THICKNESS:
2:G/F PATING&Sn AT CONTACT AREA Ni UNDFR PLATING OVERALL
5. SHELL PLATING:
1:SPCC NICKELPLATING OVERALL, AND TAB WITH Tin PLATED
2:C2680 NICKELPLATING OVERALL, AND TAB WITH Tin PLATED
6. MATERIAL OF CONTACT:
0:BRASS

KEM 奇速科技有限公司 Qi-Speed Technology CO., LTD.					產品名稱: PRODUCT NAME USB A/F 90° SMT短体10.6 四脚椭圆有卷边反向	
單位：mm 		繪圖	設計	審核	核准	料號:KUAS106-4XL2X0 PART NUMBER
比例：		DRAWING	DESIGNED	CHECKED BYAPPROVAL BY		
公差：.X ±0.35 .XX ±0.25 .XXX ±0.15		JOHNY	JOHNY	LUKE	JAMES	圖號:KUAS106-4XL2X0-1 DRAWING NO
日期：2017/12/25						版本: REV. 0