
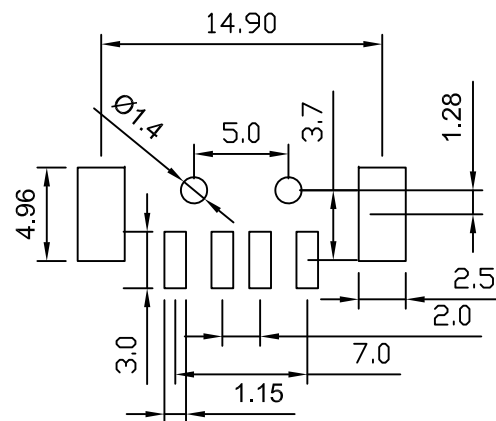
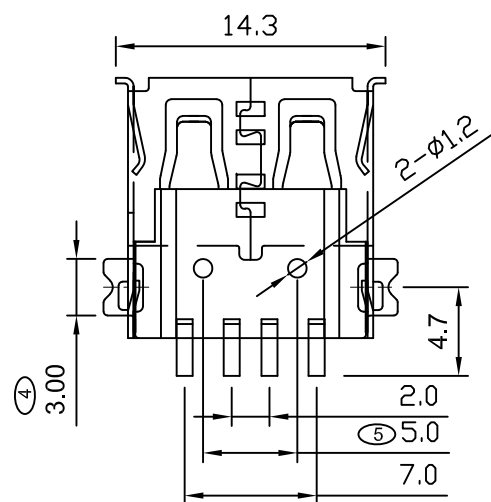
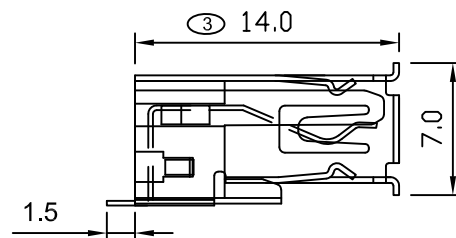


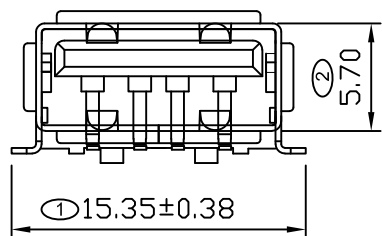

RECOMMENDED PCB LAYOUT

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触电阻: Contact Resistance
30 milliohms MAX
4. 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.0kgf(MIN)

原材料: Material:

1. 塑胶/颜色: Housing/Color:
LCP/X=W:WHITE OR K:BLACK
2. 端子: Contact: Copper Alloy
3. 外壳: Shell: SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
端子四周镀50U”(MIN)锡, 镀金区域镀100—200U”镀金1U”
2. 外壳: Shell:
四周镀80U”(MIN)镍

Nickel Plating

※ SIGN “(X)” IS IMPORTANCE DIMENSION

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

产品名称:
PRODUCT NAME
USB 2.0 AF贴片有卷边带定位柱14.0

单位: mm	繪圖	設計	審核	核准	料號: KUAS19-4XL210
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KUAS19-4XL210-1
日期: 2022/4/20					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0