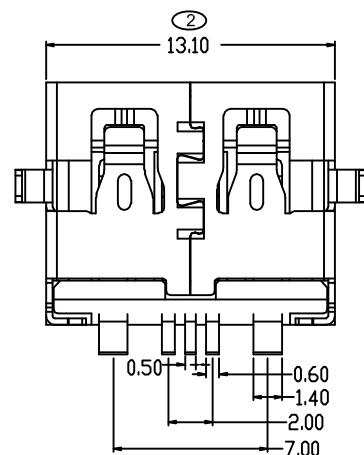
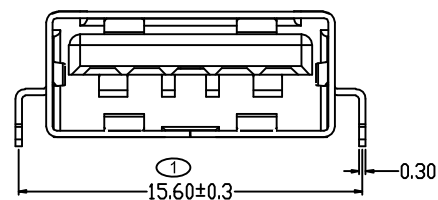
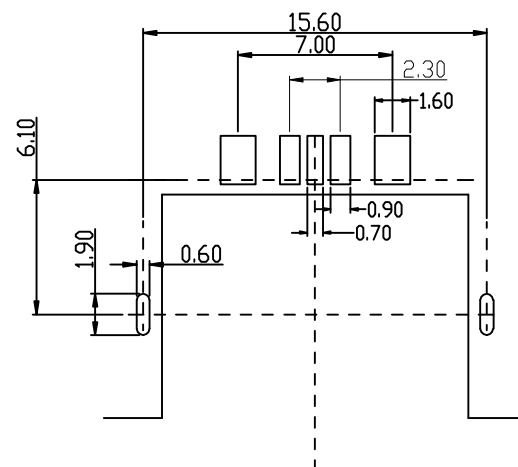
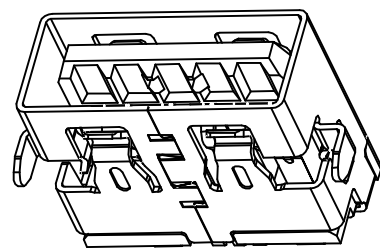


規格說明：Specifications:

電氣特性：Electrical:

1. 額定電流：Current Rating
5A/contact terminal
2. 額定電壓：Voltage Rating
30V DC
3. 接觸阻抗：Contact Resistance
30 million ohms MAX
4. 耐電壓：Dielectric Withstanding Voltage：
500 V AC
5. 絕緣阻抗：Insulation Resistance:
1000MEGA ohms MIN

物理性能：Mechanical

1. 插拔力：Connector mate and Unmate Force
Mate force: 3.0kgf(MAX)
Unmate force: 0.7kgf(MIN)
2. 端子保持力：Terminal Retention
1.2kgf(MIN)

原材料：Material:

1. 塑膠：Housing:
Hing Temperature Thermoplastics,
UL 94V-0 PA9T Green
2. 端子：Contact: Copper Alloy
3. 外殼：Shell: Copper Alloy/ SPCC

電鍍：Finish:

- 端子：Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 外殼：Shell:
Nickel Plating

※ SIGN “(X)” IS IMPORTANCE DIMENSION

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
USB AF 短體 1.9 沉板 (5PIN)

單位：mm	繪圖	設計	審核	核准	料號: KUAS30-5XA2X0
比例：	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差：.X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KUAS30-5XA2X0-1
日期：2021/8/4					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0