
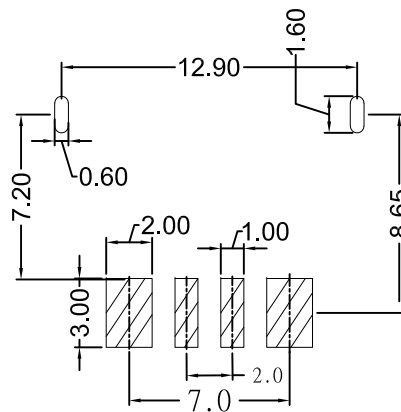
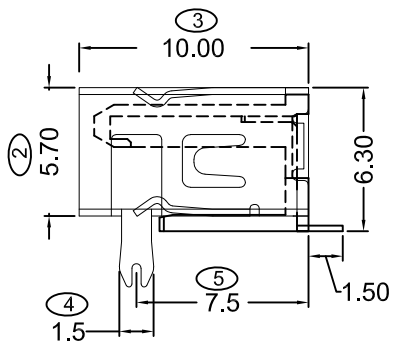

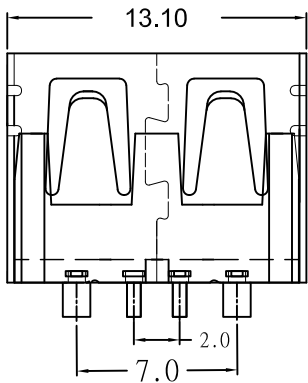




RECOMMENDED PCB LAYOUT

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
3.1A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触电阻: Contact Resistance
30 milliohms MAX
4. 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.0kgf(MIN)

PRODUCT NUMBER

KUAS31 - 4 XL 2 X 0

1. PRODUCT CODE:
KUAS31: USB A TYPE PLUG CONN.
2. POSITIONS:
4: 4 POSITIONS
3. INSULATOR COLOR OR HOUSING:
W: WHITE L: LCP
K: BLACK
4. CONTACT PLATING THICKNESS:
2: PLATING GOLD IN MATING AREA; TIN ON SOLDER TAILS.
5. SHELL PLATING:
1: SPEE NICKEL PLATING OVERALL.
2: C2680 NICKEL PLATING OVERALL.
6. MATERIAL OF CONTACT:
0: BRASS

※ SIGN “(X)” IS IMPORTANCE DIMENSION

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME

USB 2.0 AF 短体 90度前插
后贴无卷边大电流鱼叉脚

單位: mm	繪圖	設計	審核	核准	料號: KUAS31-4XL2X0
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號: KUAS31-4XL2X0-1
日期: 2022/3/30					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0