


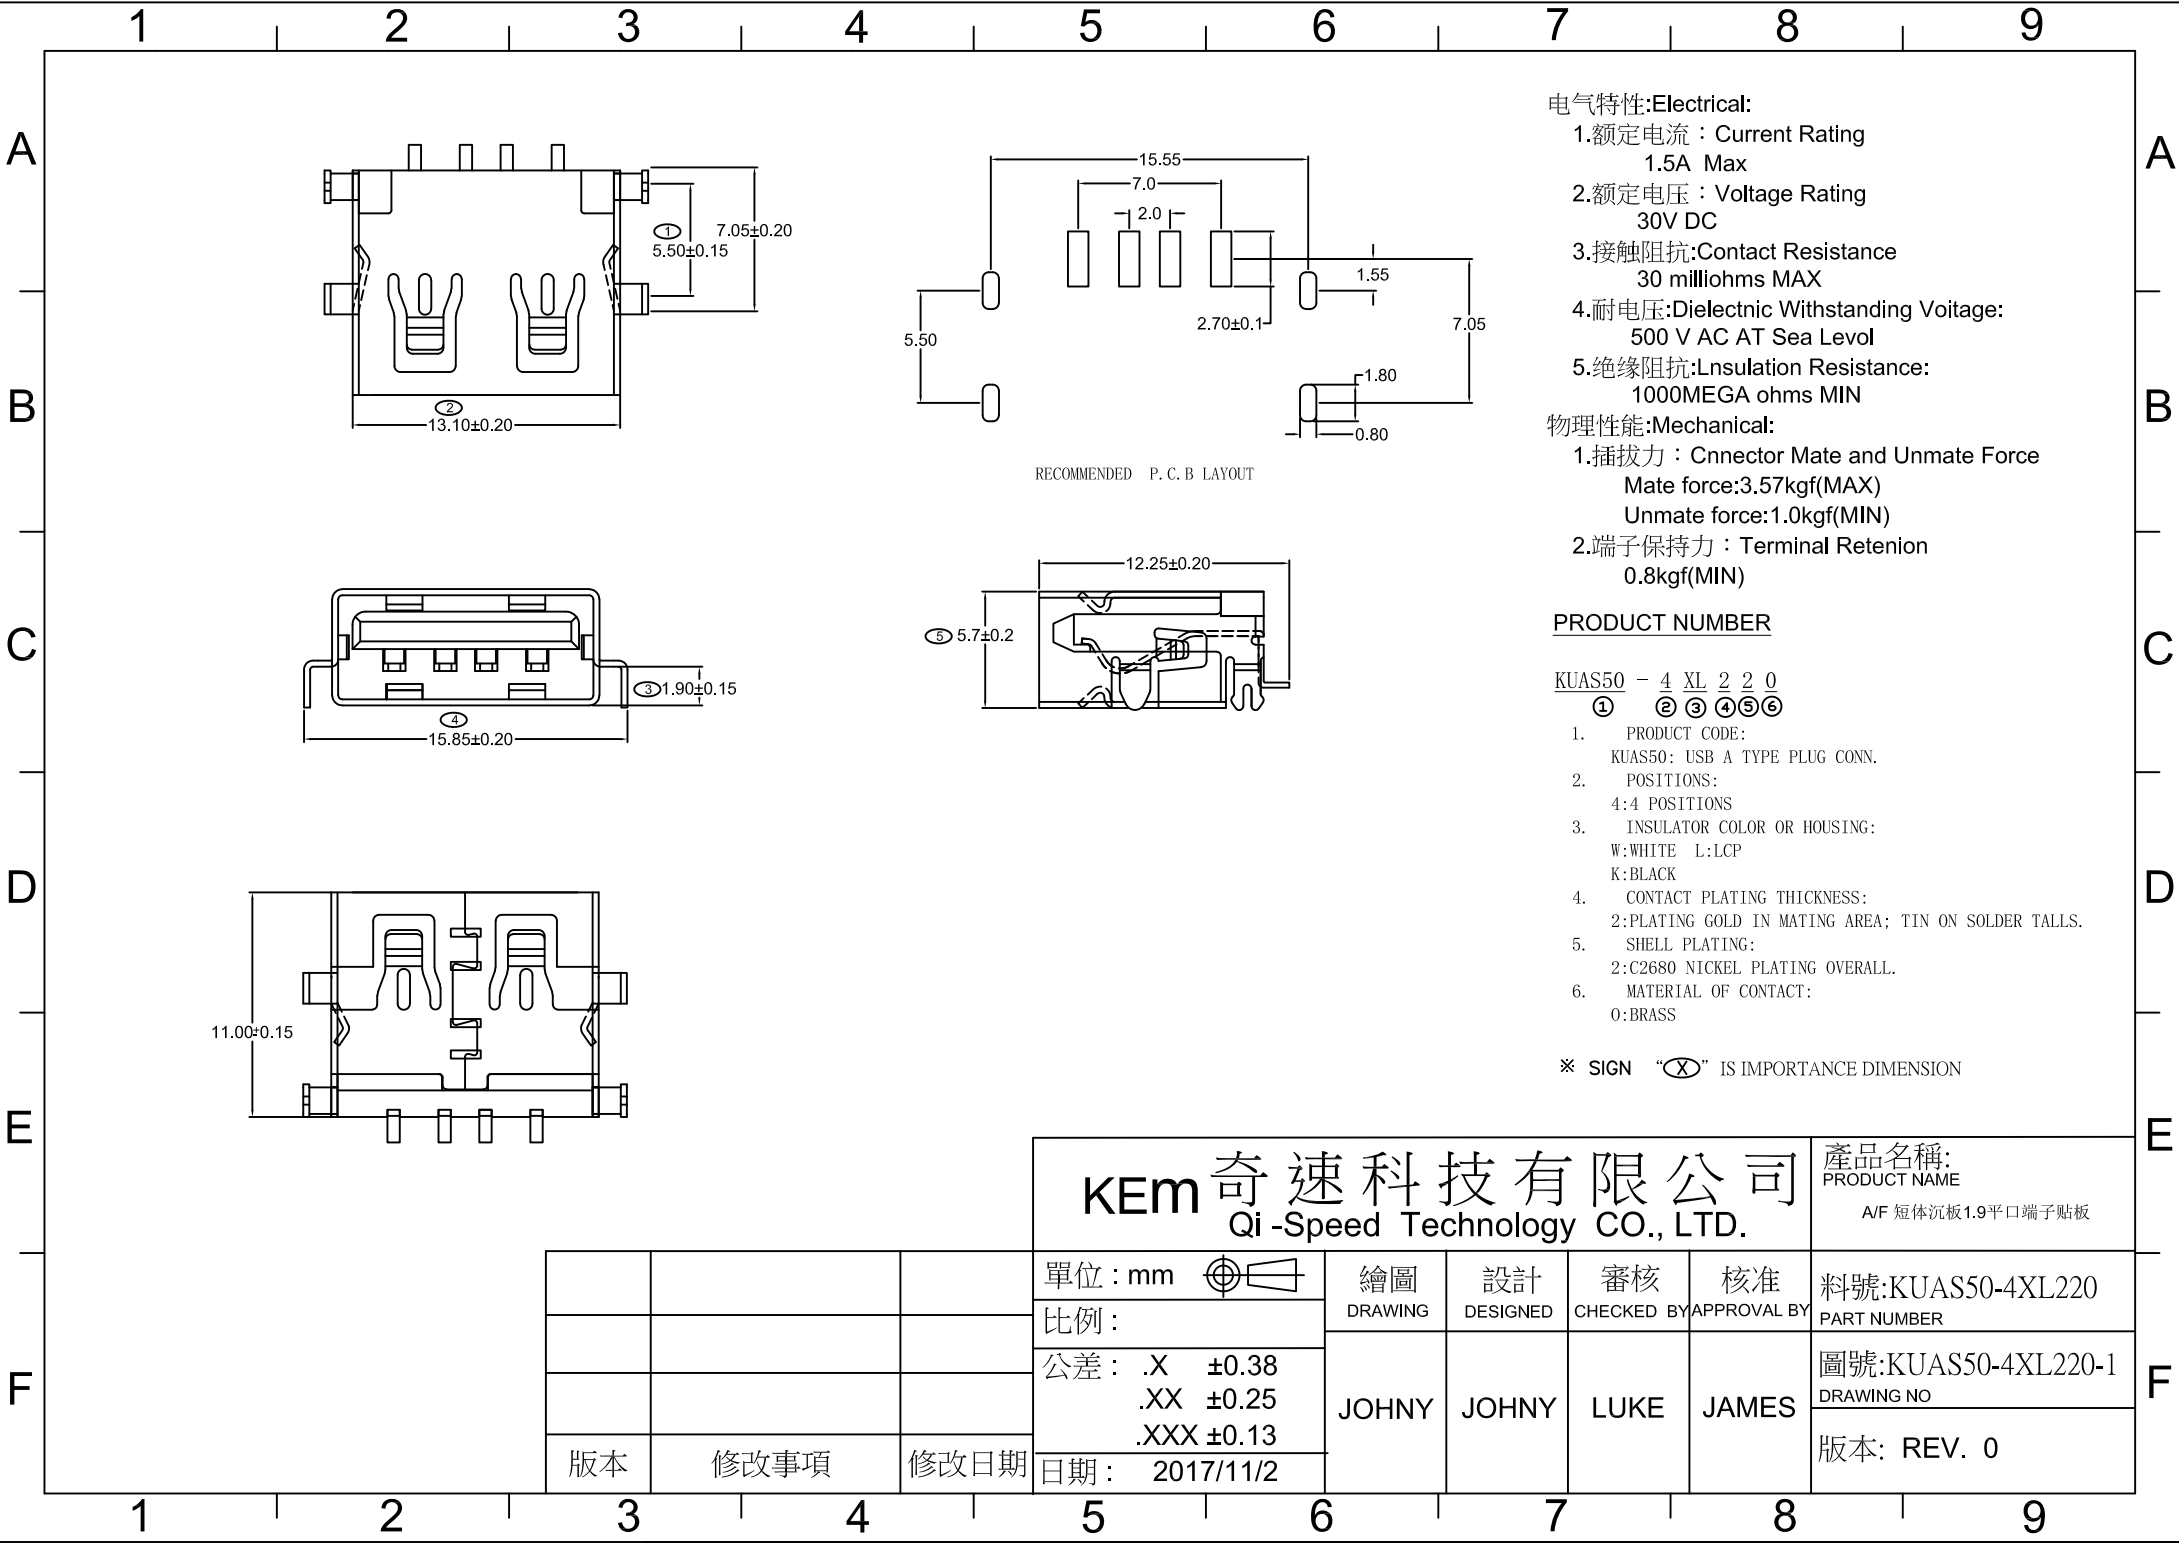

- 电气特性:Electrical:
- 1.额定电流：Current Rating
1.5A Max
 - 2.额定电压：Voltage Rating
30V DC
 - 3.接触阻抗:Contact Resistance
30 milliohms MAX
 - 4.耐电压:Dielectric Withstanding Voitage:
500 V AC AT Sea Levl
 - 5.绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN
- 物理性能:Mechanical:
- 1.插拔力：Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.0kgf(MIN)
 - 2.端子保持力：Terminal Retenion
0.8kgf(MIN)

PRODUCT NUMBER

- KUAS50 - 4 XL 2 2 0
- ① ② ③ ④ ⑤ ⑥
- 1. PRODUCT CODE:
KUAS50: USB A TYPE PLUG CONN.
 - 2. POSITIONS:
4:4 POSITIONS
 - 3. INSULATOR COLOR OR HOUSING:
W:WHITE L:LCP
K:BLACK
 - 4. CONTACT PLATING THICKNESS:
2:PLATING GOLD IN MATING AREA; TIN ON SOLDER TALLS.
 - 5. SHELL PLATING:
2:C2680 NICKEL PLATING OVERALL.
 - 6. MATERIAL OF CONTACT:
0:BRASS

※ SIGN “ⓧ” IS IMPORTANCE DIMENSION

KEM奇速科技有限公司 Qi-Speed Technology CO., LTD.					產品名稱: PRODUCT NAME A/F 短体沉板1.9平口端子贴板	
單位：mm		繪圖	設計	審核	核准	料號:KUAS50-4XL220
比例：		DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差：.X ±0.38 .XX ±0.25 .XXX ±0.13		JOHNY	JOHNY	LUKE	JAMES	圖號:KUAS50-4XL220-1
日期：2017/11/2						DRAWING NO
版本	修改事項	修改日期				版本: REV. 0