
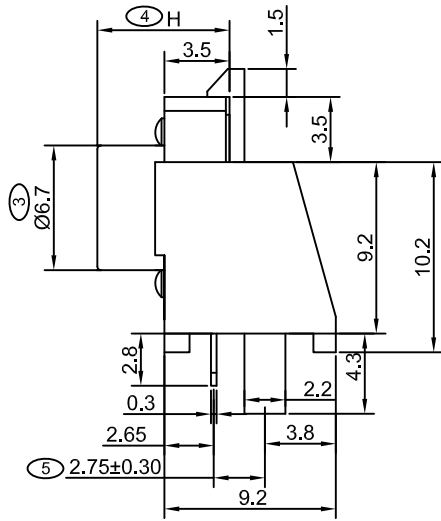
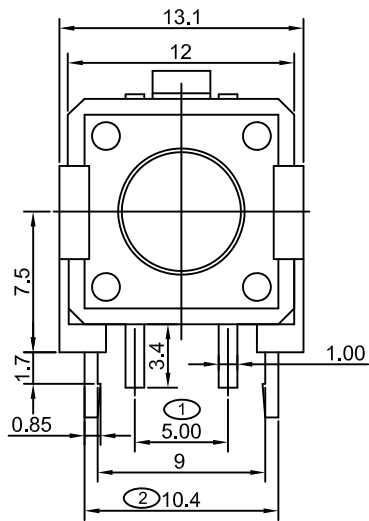


印制线路板图



电路图



主要技术规格:

1. 额定值: 50mA DC12V
2. 接触电阻: $\leq 50m\Omega$
3. 操作力: $250 \pm 40gf$
4. 行程: $0.25 \pm 0.1mm$
5. 绝缘电阻: $\geq 100M\Omega$
6. 抗电强度: 250V 50HZ 1Min.
7. 寿命: 100,000 Cycles

* SIGN “(X)” IS IMPORTANCE DIMENSION

ITEM (XX)	H (mm)
00	4.5
01	5.0
02	5.5
03	6.0
04	6.5
05	7.0
06	7.5
07	8.0
08	8.5
...	...

6	引脚、触点	1	黄铜	镀银
5	支架	1	PA66	黑色
4	基座	1	PPA	黑色
3	簧片	1	不锈钢	镀银
2	盖板	1	冷轧钢	镀锡
1	按键	1	PPA	黑色
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

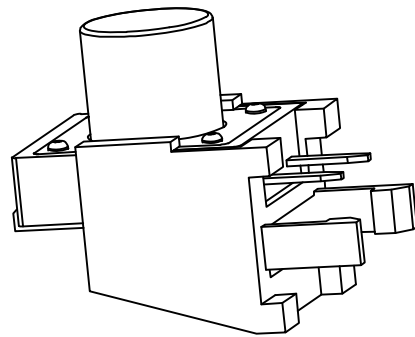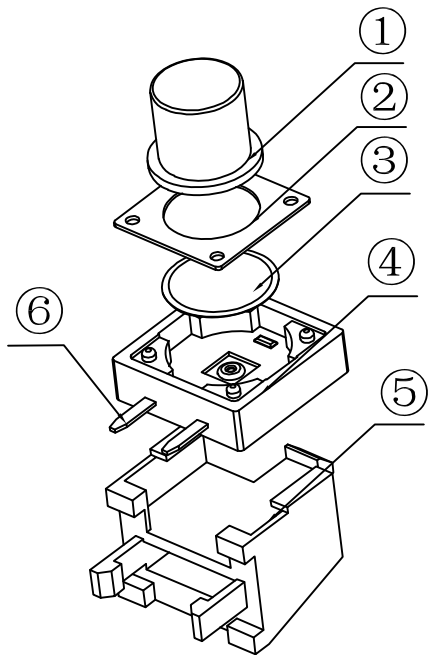

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
轻触开关侧按带支架12*12 DIP型

版本	修改事項	修改日期

單位: mm	繪圖	設計	審核	核准	料號: KTS-DPG012-XX
比例:	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差: X. ± 0.38 .X ± 0.30 .XX ± 0.25	JOHNY	JOHNY	LUKE	JAMES	圖號: KTS-DPG012-XX-1 DRAWING NO
日期: 2022/2/25					版本: REV. 0