
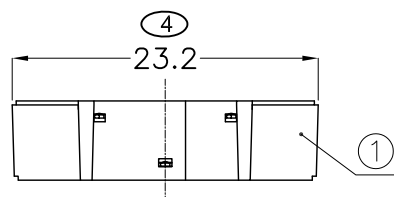
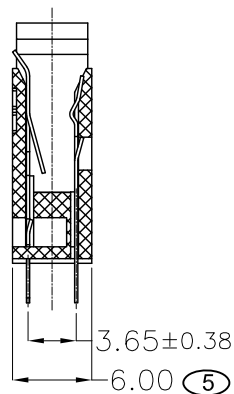
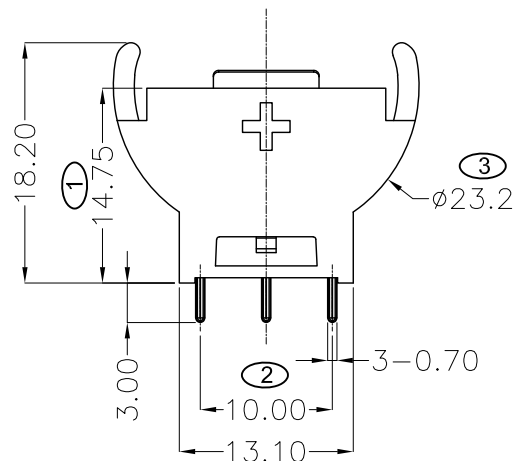


PCB Layout Diagram
Top View

NOTE:

1.MATERIAL:

- a.HOUSING:PA66
b.CONTACT:BRASS
(SURFACE PLATING: Ni)

2.ELECTRIC:

- a.CONTACT RESISTANCE: 100 MILLIOHMS MAX
b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
c.DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE: -25°C~ +85°C

※ SIGN “(X)” IS IMPORTANCE DIMENSION

3	TERMINAL(-)	1	BRASS, T=0.25mm	Ni Plating
2	TERMINAL(+)	1	BRASS, T=0.25mm	Ni Plating
1	HOUSING	1	PA66	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

KEM 奇速科技有限公司
Qi-Speed Technology CO., LTD.

產品名稱:
PRODUCT NAME
CR2032電池座 直立式

單位 : mm	繪圖	設計	審核	核准	料號:KCR2032G-021G
比例 :	DRAWING	DESIGNED	CHECKED BY	APPROVAL BY	PART NUMBER
公差 : .X ±0.38 .XX ±0.25 .XXX ±0.13	JOHNY	JOHNY	LUKE	JAMES	圖號:KCR2032G-021G-1
日期 : 2018/12/18					DRAWING NO
版本	修改事項	修改日期			版本: REV. 0